


The 200-Pound Slide for 4U to 8U Chassis


- Side space .50 inch [12.7 mm]
- Profile height 2.03 inches [52 mm]
- Two inches [50.8 mm] of over travel
- 200-pound [91 kg] load capacity



3507

We've simplified and strengthened our hardware, so you can mount critical components securely.

Heavier chassis with vital contents such as mission critical databases demand durable and reliable mounting hardware. And when servicing is needed, immediate access is imperative. Model 3507 is the solution for this type of installation. Carrying a 200-pound load rating, the 3507 was specifically designed for larger, heavier electronic enclosure applications.

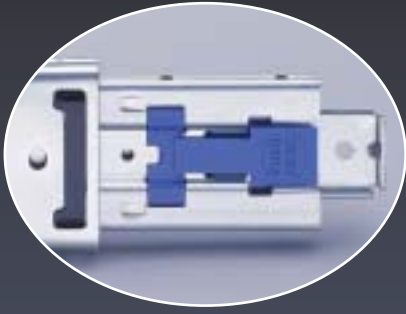

Pinch-free disconnect
located at front
of slide

More space and access

- Narrow width of .50 inch [12.7 mm] maximizes space for dense chassis installations.
- Two inches [50.8 mm] of over travel give access to the front, rear and sides of the unit.
- Lock-out option keeps chassis stable during servicing.
- Pinch-free, spring disconnect makes drawer removal and reinsertion easy.
- One-Motion Insertion™ simplifies reinsertion and installation of heavier loads.

More options

- Brackets provide two inches [50.8 mm] of adjustment.
- Compatible with a wide range of third-party rack configurations.
- Guide pins provide stability for cable management attachment directly to slides.
- Even lengths: 16 to 30 inches [406–762 mm].
- Plating: Clear zinc.

Authorized Distributor

Accuride

Headquarters and Main Plant
12311 Shoemaker Avenue
Santa Fe Springs, CA 90670
(562) 903-0200
(562) 903-0208 Fax
www accuride.com