


闭合位置齐平或在闭合位置之内

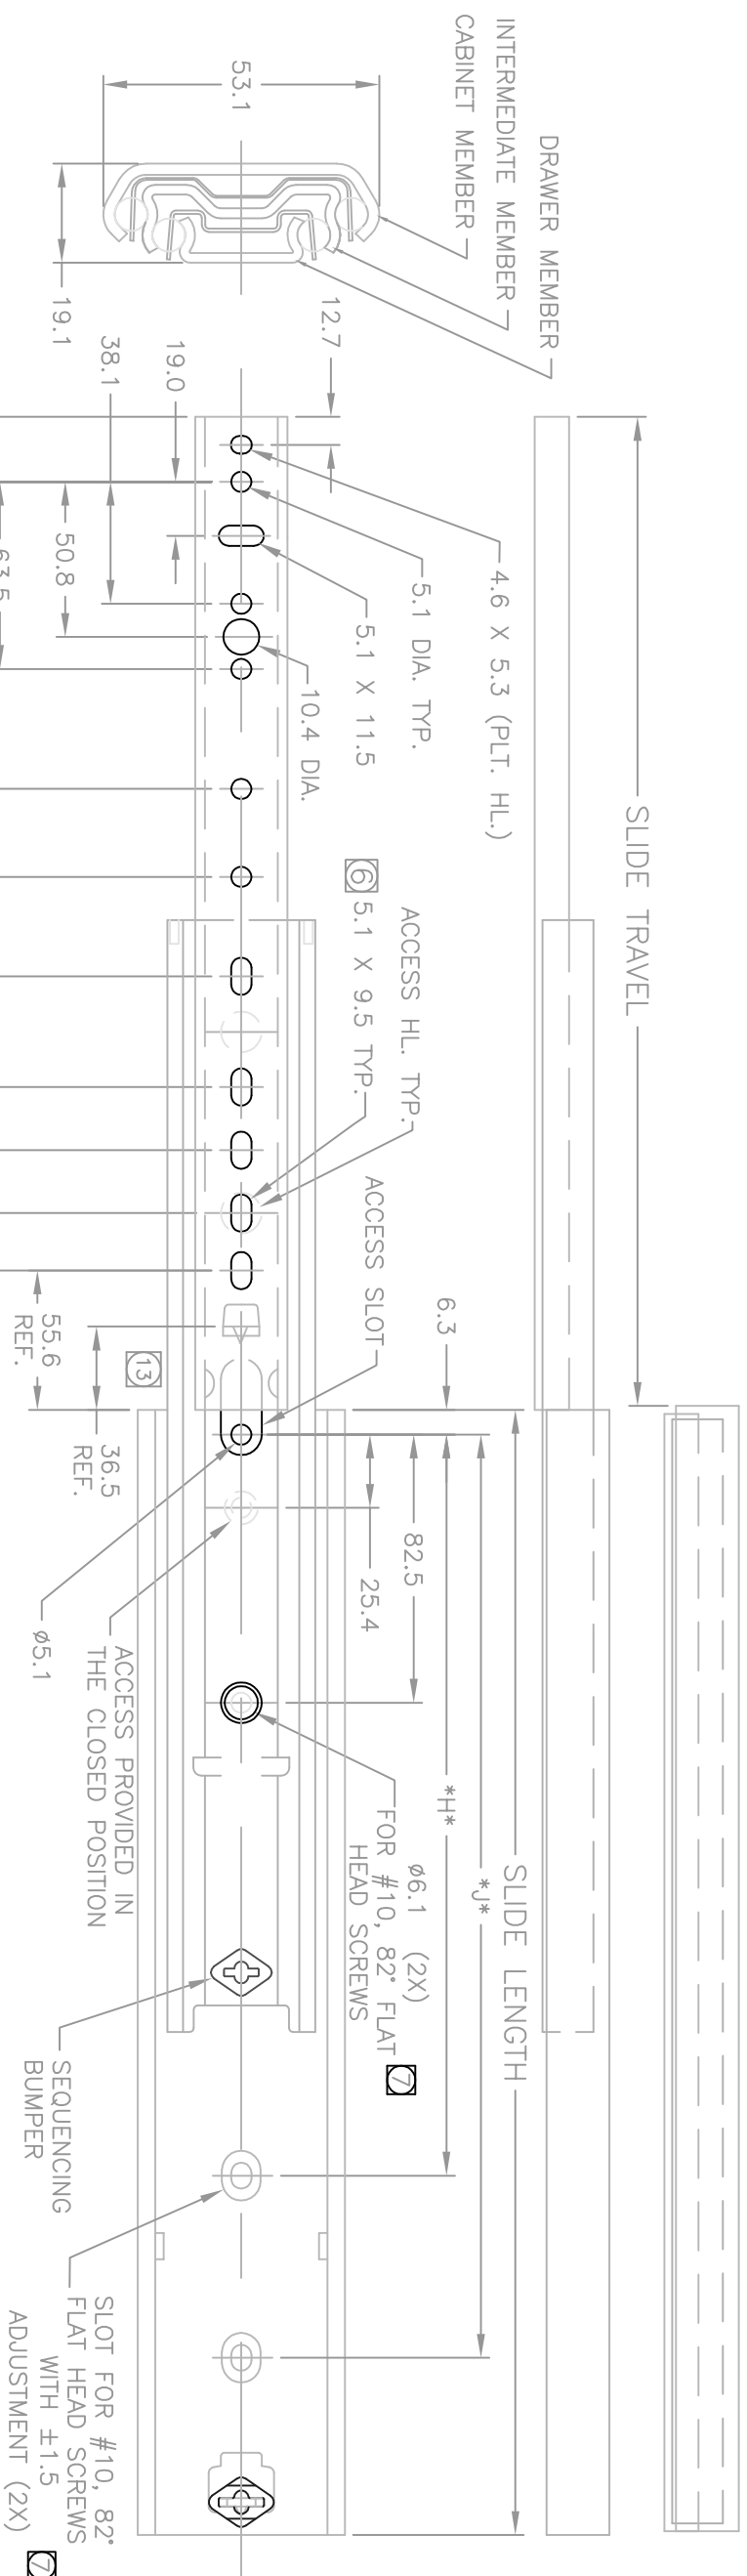

SLIDE LENGTH	SLIDE TRAVEL	LOAD RATING (LB.)	*A*	*B*	*C*	*D*	*E*	*F*	*G*	*H*	*J*
10.00[254]	10.00[254]	276	±.015[.4]	±.015[.4]	±.015[.4]	±.015[.4]	±.015[.4]	±.015[.4]	±.015[.4]	±.015[.4]	±.015[.4]
12.00[305]	12.00[305]	273	-	-	-	-	-	-	-	-	-
13.00[330]	13.00[330]	270	-	-	-	-	-	-	-	-	-
14.00[356]	14.00[356]	267	-	-	-	-	-	-	-	-	-
15.00[381]	15.00[381]	264	-	-	-	-	-	-	-	-	-
16.00[406]	16.00[406]	261	-	-	-	-	-	-	-	-	-
17.00[432]	17.00[432]	257	-	-	-	-	-	-	-	-	-
18.00[457]	18.00[457]	253	-	-	-	-	-	-	-	-	-
19.00[483]	19.00[483]	248	-	-	-	-	-	-	-	-	-
20.00[508]	20.00[508]	244	-	-	-	-	-	-	-	-	-
21.00[533]	21.00[533]	239	-	-	-	-	-	-	-	-	-
22.00[559]	22.00[559]	233	-	-	-	-	-	-	-	-	-
23.00[584]	23.00[584]	227	-	-	-	-	-	-	-	-	-
24.00[610]	24.00[610]	220	-	-	-	-	-	-	-	-	-
25.00[635]	25.00[635]	212	-	-	-	-	-	-	-	-	-
26.00[660]	26.00[660]	203	-	-	-	-	-	-	-	-	-
27.00[686]	27.00[686]	193	-	-	-	-	-	-	-	-	-
28.00[711]	28.00[711]	182	-	-	-	-	-	-	-	-	-

- 滑轨无左右之分。
- 除了组件图中标示的孔之外，ACCURIDE有选择权决定添加其它的孔。
- 仅用10# (82°) 扁平头螺钉安装穿过型的滑轨组件
- 穿过型的滑轨组件
- 测量滑轨的宽度以闭合位置为准，穿过滑轨组件与球轴承充分接触的区域。
- 表面处理：锌电镀，铬涂层，光亮镀锌对“C” & 黑色镀锌对“CB”前缀。
- 滑润剂：适用高温条件下的滑润油脂。
- 球轴承：使用渗碳钢。
- 材料：滑轨组件和元件部分：加工硬化，冷轧钢
- 注释：如无其它指定

- 此区域不允许有任何的安装孔位或者其它孔位，否则螺钉头会和缓冲器干涉
- 滑轨具有顺序制动以增加承载量
- 滑轨在闭合的位置具有制动功能
- 滑轨在开始和闭合的位置具有抑制噪声功能

REV	IS	DESCRIPTION	WAS	DATE	APPD
REVISIONS					
<p>Accuride</p> <p>CUSTOMER: Accuride</p> <p>SCALE: N.T.S.</p> <p>DATE: 02/20/08</p> <p>DRAWN: RAMO</p> <p>APPROVED:</p> <p>CONTROLLING DOCUMENT: ACCURIDE</p> <p>OTHERWISE INDICATED: TOL. ± 0.25MM, T.V. ± 3.3MM, HOLES: 0.15MM, ANG. ± 1°</p> <p>CUSTOMER DOCUMENT OF STANDARD SLIDE</p> <p>PART NUMBER: 3600-12/28</p> <p>REV: D</p>					

THIS DOCUMENT IS FURNISHED FOR THE EXPRESS AND EXCLUSIVE PURPOSE OF CONVEYING INFORMATION TO CUSTOMERS AND SUPPLIERS OF ACCURIDE INTERNATIONAL, INC., AND IS NOT TO BE REPRODUCED OR DISCLOSED TO COMPETITIVE SOURCES.