



## Precision Movement Solutions For Wood Applications & Wood Cabinetry

**Accuride®**  
Always Moving Forward



Accuride International Inc. began as a small tool and die shop in 1962 in South Gate, California, producing top-quality slides for tape drives and copy machines.

In the late 1960s, Accuride developed ball bearing slides for metal office furniture. The company's design engineers then took on the wood furniture market, developing features such as breathing tabs to absorb tolerances in wood products.

Today, still privately held, Accuride has nearly one million square feet of manufacturing space around the world and is the largest company in the world dedicated to the innovative design and manufacturing of ball bearing slides. Accuride slides are designed into a wide range of applications from fine furniture and appliances, to electronic enclosures, and automotive and industrial equipment.

Accuride built its reputation on quality and ensures strict standards are met by maintaining control over many manufacturing processes others routinely job-out. Progressive dies, roll forms, and plating lines are designed, built, and maintained in house, as are other key tools and machinery.


The North American facilities feature the largest tooling operation in the industry. Globally, Accuride employs more than 100 tool and die makers, has 77 roll form machines and two in-house steel mills.

Accuride plates over 75,000,000 square feet of material per year and is the largest zinc plater in the world. Accuride was the first slide manufacturer to use the electrocoating process on ball bearing slides and has developed finishes that vigorously resist corrosion.

Accuride's test laboratory is among the largest in the industry. Products are tested to meet or exceed standards established by ANSI and other testing agencies.

Accuride was the first U.S. based slide manufacturer awarded ISO 9001 certification. Today, all our production facilities have quality management systems registered to ISO 9001:2008.

As a part of Accuride's global commitment to adhering to local environmental laws (even exceeding the standards, whenever practical), using raw materials efficiently, and reducing waste, all slide finishes and components comply with the Restriction of Hazardous Substances (RoHS) Directive.

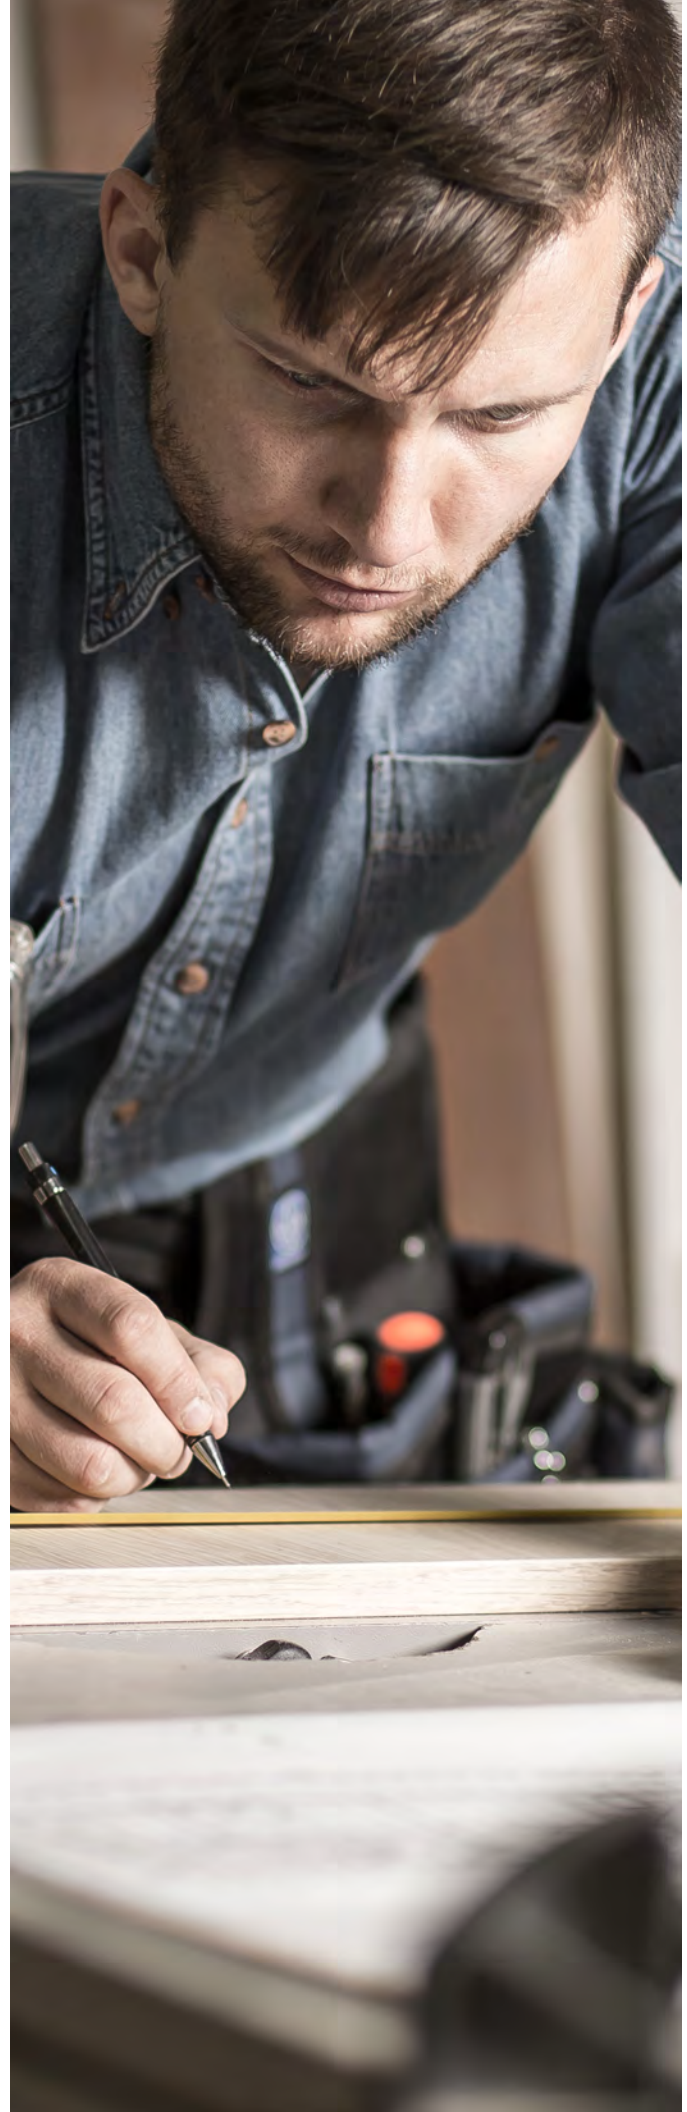



## Slides for Wood Furniture & Wood Cabinetry

### **Technical Information..... 2**

*Slide Selection Criteria*

### **Cross Section Guide..... 4-7**

### **Slides at a Glance..... 8-9**

### **Light-Duty Slides..... 10**

*1029, 2632, 2132*

### **Medium-Duty Slides ..... 12**

*3732, Eclipse Undermount, 3832E Family,  
7432/7434, 3017*

### **Heavy-Duty Slides..... 18**

*400 Series, 3634EC/3634, 3641, 3640A,  
3600, 3607, 3657, 7950, 7957,  
9301E, 9307E, 9308E*

### **Corrosion-Resistant Collection ..... 25**

*SS2028, SS0330, SS5322, SS5321,  
AL4140, AL4120*

### **Flipper Door Slides® ..... 29**

*117, 1145, 1155, 123/1234,  
1321 Pro Pocket, 1332/1432*

### **Specialty Slides..... 34**

*Ascent, CB3620-258TV, 2006, 2109,  
Keyboard Tray Systems, 2019, 2002, 0363,  
322, 340, 301-2590, 3600-200, 3600-201,  
115RC, 116RC, CB-Hand Locking Handle Kit  
AL4190 Tilt Track System*

### **Limited Lifetime Warranty..... Back Cover**



To download a digital version  
of this catalog and other  
resources scan this QR code.

## TO THE READER:

This catalog is designed to assist you in making the proper slide selection for your application. The information listed in this section explains the pertinent factors to consider when selecting a slide. Products are categorized as follows:

- **Light-Duty Slides** – Load ratings up to 75 pounds. These slides are suitable for small box drawers in residential and commercial cabinetry.
- **Medium-Duty Slides** – Load ratings range from 90–100 pounds. This group is appropriate for residential cabinetry, casework, and commercial desk and credenza drawers.
- **Heavy-Duty Slides** – Load ratings from 100–600 pounds. Suitable for a wide range of applications such as wide lateral files, large storage drawers, file cabinets, and pantry pull-outs.
- **Corrosion-Resistant Collection** – Load ratings from 100–1,323 pounds. These products are made with stainless steel and aluminum to provide solutions for applications subjected to moisture.
- **Flipper Door Slides®** – Load ratings from 25–75 pounds. These slides carry doors for entertainment centers, overhead storage units, and armoires.
- **Specialty Slides** – Load ratings from 14.5–265 pounds. This group includes media hardware, slides for kitchen cutting boards, pencil drawers, pull-out and pass-through shelves, and keyboard trays.

For additional information, technical sheets, and specific design information, visit our web site at [www.accuride.com](http://www.accuride.com)

## DESIGN FACTORS

As with the selection of any system component, when choosing a slide for a specific application, you should consider the full range of features by comparing the project requirements to the key performance elements of the slide.

**Length**—Slide length is measured as the longest dimension of a fully closed slide. As a rule, always use the maximum length allowable in the application.

**Extension**—Or travel refers to how far the drawer extends from the cabinet.

- 3/4 extension** Drawer opens partially, about 3/4 of the total slide length.
- Full extension** Drawer opens the same amount as the slide length.
- Over travel** Drawer opens more than the length of the slide.

**Drawer Width**—In general, wider drawers require a

slide with a higher load rating and a cross section designed to withstand lateral stress. All slide products carry a maximum recommended drawer width.

**Types of Movement**—There are generally two types of slide movement:

- Telescoping** Slide movement occurs in stages. The drawer member extends fully and then picks up the intermediate member, pulling it to the end of the travel.
- Progressive** Movement is a result of all slide members moving simultaneously. This type of movement provides extremely smooth, quiet movement.

**Disconnects**—Slides with a disconnect method allow for the removal of the drawer or drawer member. Four types of disconnects are commonly found on slides for commercial and residential applications:

- Lever** Disconnect is achieved by releasing an internal lever and pulling the drawer straight outward, away from the cabinet.
- Rail** A rail latch allows you to raise the drawer off the slide and away from the cabinet. This type of disconnect facilitates smooth movement and easy drawer removal.
- Friction** No levers or latches are required to remove the drawer. Disconnect is achieved by pulling the drawer firmly through the resistance of the ball retainer.
- Push Latch** A latch is pressed to release the drawer. Disconnect is achieved by pulling the drawer firmly through the resistance of the ball retainer.

**NOTE:** Disconnect instructions are available online at <https://www.accuride.com/en-us/resources/videos/slide-terminology>

**Slide Profiles**—More than one slide profile (or height) may be appropriate for a given application. Accuride provides several low-profile design options for applications in which a smaller profile would enhance the appearance of the completed unit.

## LOAD FACTORS

**Load Rating**—Most Accuride slides are tested a minimum of 50,000 cycles in accordance with the guidelines of all applicable ANSI/BIFMA specifications, or as appropriate for some moderate use applications. See the product technical sheet for specific information regarding test criteria. Thorough testing means that you can count on Accuride slides to meet industry-accepted criteria.

Our slides are rated for the dynamic load that an 18" pair will carry without failure (load rating decreases proportionally beyond the 18" length). In all cases, the static (resting) load capacity of each model is at least twice the load rating, providing at minimum a 100% static safety factor, even when the slide is loaded to its maximum rating. Because slide performance may be affected by factors unique to a specific application, always test slides in the intended application.

**Flat Mounting**—For optimal slide performance, mount slides only as indicated in the catalog or on the technical sheet. Certain slides may be mounted flat under a drawer, but the resulting load rating will be at least 50% less than the load rating applicable to the same pair of slides mounted vertically on the side of the drawer. Please consult the product technical sheet for specific flat-mount load rating information.

**Shock/Vibration**—Subjecting slides to shock and vibration may adversely affect the performance. Applications that are subject to these conditions should be tested to evaluate the affect on slide performance. If conditions are severe, select a heavier-duty slide.

## APPLICATION FACTORS

**Unit Construction**—When installed in a drawer or cabinet that is lightweight and flexible, drawer slides can contribute to the structural rigidity of the unit. To ensure that the slide is able to provide this support, select a model with a slightly higher load rating and larger cross section than you would ordinarily need for the application.

**Installation**—Most slides are designed to be mounted in pairs on the sides of drawers or moving unit. When installing slides, exercise care to ensure that they are mounted parallel to each other, in vertical and horizontal axes.

Before mounting slides other than as designed, carefully consider any potential adverse effects on the slide and, if necessary, consult the factory.

For example, mounting slides flat under the drawer, rather than on the side, will lower the load rating by at least 50%, but mounting a slide high on one side and low on the other side will have little adverse effect on load rating.

Be sure to evaluate the mounting scheme thoroughly and test as needed. Not all slide models can be used in flat-mount applications.

## ENVIRONMENTAL FACTORS

Unless otherwise stated, Accuride slides are designed for indoor use and should be protected from excessive moisture, chemical fumes, dirt, and corrosion. The Accuride self-cleaning ball retainer protects slide raceways by removing foreign particles between ball bearings. The lubricant provided is sufficient for normal slide life.

Use care when applying finishing agents because overspray may negatively affect slide movement. Should you need to clean the slides, you can re-lubricate them with a quality grease rated "EP" for extreme pressure.

Extreme temperatures can also affect the lubricant and plastic or rubber components. Commercial drawer slides are designed to be used for extended periods in temperatures between 0 and 180 degrees Fahrenheit. For service outside normal temperature and humidity ranges, consult the factory.

## MATERIALS & FINISHES

**Steel Slides**—Slide members and ball retainers are made from cold-rolled steel, ball bearings are carburized steel.

**Standard Finish (C):** Clear zinc electroplate

*Optional Finishes:*

**CB** - Black Chromate over Zinc

**CH** - Clear Chromate over Zinc w/8x Corrosion Protection

**CE** - Clear Chromate over Zinc w/Corrosion Protection (over CH)

**CP** - Clear Chromate over Zinc w/Corrosion Protection (over CE)

**EW** - Electroplate White

**Stainless Steel**—Slide members, ball retainers, and ball bearings are stainless steel.

**Aluminum**—Slide members are aluminum, ball retainers and bearings are stainless steel.


## TECHNICAL SUPPORT

Please visit the *Technical Resources* section on our web site at [www.accuride.com](http://www.accuride.com) for the most current technical information.


For further assistance, use the online *Technical Support Request* or send an e-mail to [technical@accuride.com](mailto:technical@accuride.com)

## LIGHT-DUTY


**1029**  
35 lbs.  
Max. drawer width 16"



**2632**  
65 lbs./pr.  
Max. dwr. width 16"




**2132** ♦  
75 lbs./pr.  
Max. dwr. width 16"




## MEDIUM-DUTY


**3732**  
100 lbs./pr.  
Max. dwr. width 16"




**ECLIPSE 3135EC** ♦  
100 lbs./pr.  
Max. dwr. width 30" wide

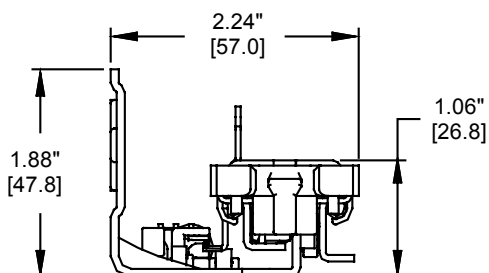


**ECLIPSE 3160EC** ♦  
100 lbs./pr.  
Max. dwr. width 30" wide

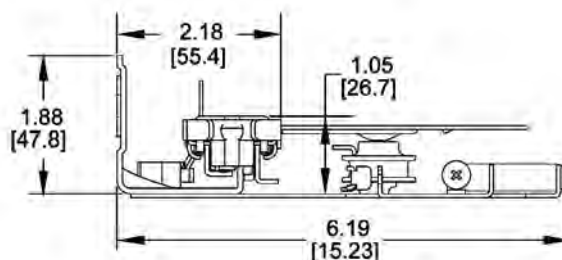


**3832E** ♦♦ / **3834E** \*  
90-100 lbs./pr.  
Max. dwr. width 16"



**7432/7434** ♦♦  
100 lbs./pr.  
Max. dwr. width 24"

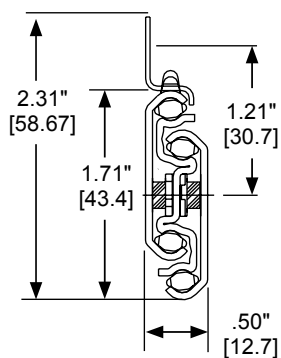

**3017**  
100 lbs./pr.  
Max. dwr. width 24"

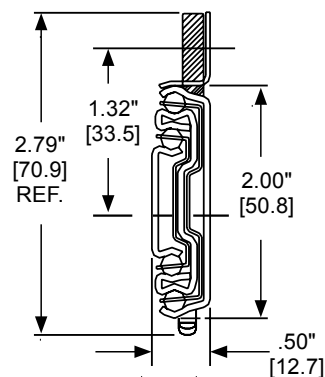

♦ - BHMA Certified


♦♦ - AWI Acknowledged

\* - Varies by model


## HEAVY-DUTY

**4032/33/34/35**


100–150 lbs./pr.  
Max. dwr. width: 18"–27"

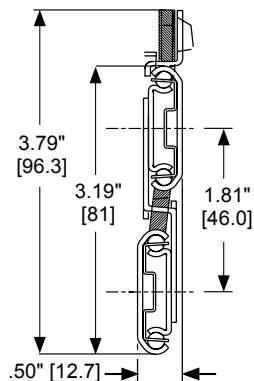**3641** ♦


180 lbs./pr.  
Max. dwr. width 42"

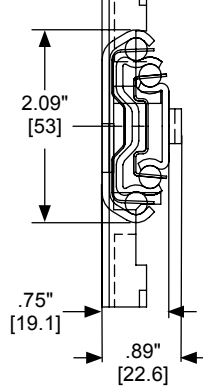**3640A**


200 lbs./pr. side mount  
Max. dwr. width 42"  
75 lbs./pr. flat mount  
Max. dwr. width 24"

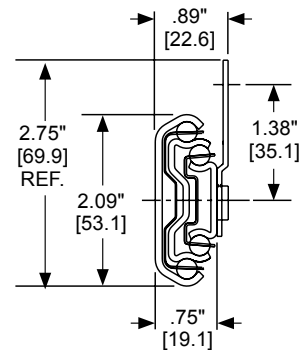**3600/3607/3657**


200 lbs./pr.  
Max. dwr. width 42"

**7950/7957** ♦


Side mount: 350 lbs./pr.  
Flat mount: 150 lbs./pr.  
Max. dwr. width 42"

**9301E/9307E/9308E** ♦

150–500 lbs./pr.  
Dependent on usage

**3634/3634EC**


150–200 lbs./pr.  
Up to 42" dwr. width




## CORROSION RESISTANT

**SS2028**


100 lbs./pr.  
Max. drawer width 18"

**SS0330**


143 lbs./pr.  
Max. drawer width 18"

**AL4140**


Up to 1,323 lbs./pr.

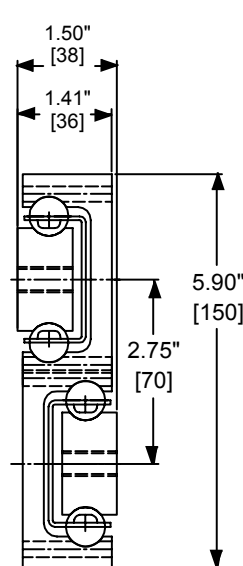**AL4120**


Up to 1,212 lbs./pr.

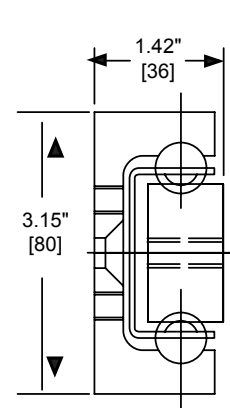**SS5321**

350 lbs./pr.  
Max. drawer width 18"

**SS5322**







265 lbs./pr.  
Max. drawer width 18"



♦ - BHMA Certified


♦ - AWI Acknowledged

FLIPPER DOOR SLIDES®

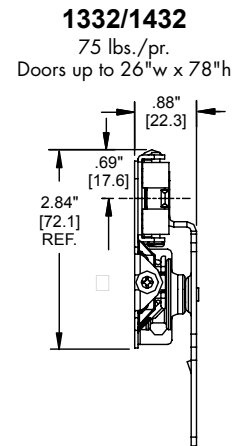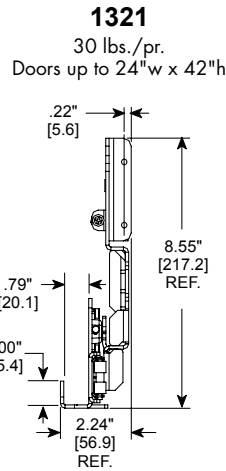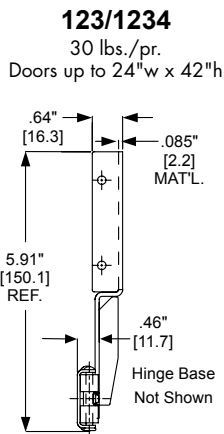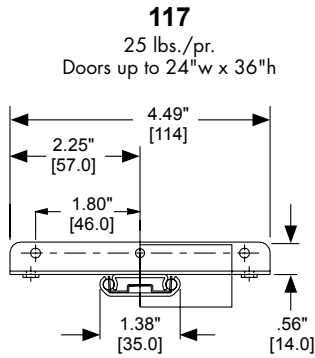


SPECIALITY SLIDE PRODUCTS


**ASCENT CBLIFT-0019**  
Up to 14.5 lbs.

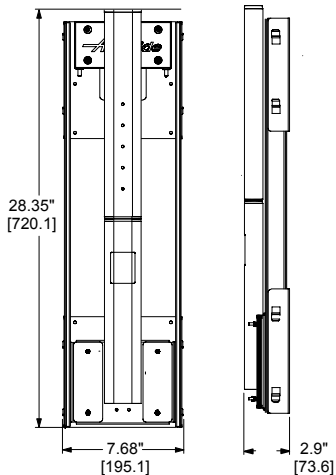


**CB3620-258TV**  
225 lbs.

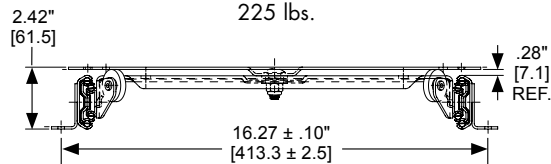


**2109** ♦  
75 lbs./pr.  
Max. dwr. width 16"

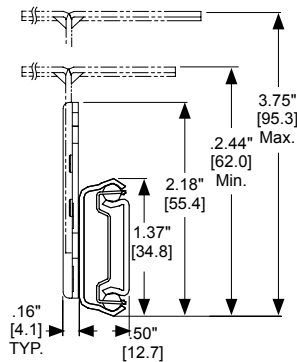

**2019**  
75 lbs./pr.  
Max. dwr. width 16"

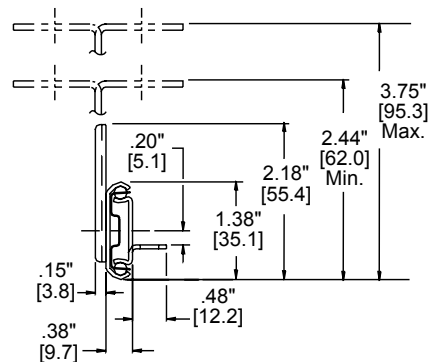

**2006**  
45 lbs./pr.  
Max. dwr. width 16"




- ♦ - BHMA Certified
- ◆ - AWI Acknowledged


## SPECIALITY SLIDE PRODUCTS

**2002**


50 lbs./pr.  
Max. dwr. width 12"

**0363**


100 lbs./pr.  
Max. dwr. width 18"

**CBERGO-TRAY200/300**


Profile width 29.6"

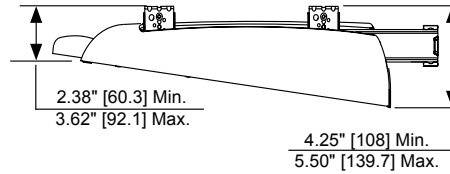**322**


100 lbs./pr.  
Max. dwr. width 16"

**340**


110 lbs./pr.  
Max. dwr. width 18"

**301-2590**


155 lbs./pr.  
Max. dwr. width 16"

**3600-200**


175 lbs./pr.  
Max. dwr. width 20"

**3600-201**


175 lbs./pr.  
Max. drawer width 20"

**116RC****HEAVY-DUTY LINEAR MOTION TRACK SYSTEM**

Up to 793 lbs. [360 kg]

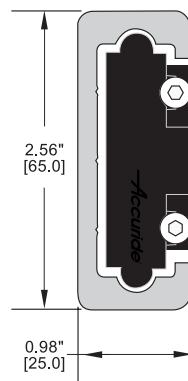
**115RC****LINEAR MOTION TRACK SYSTEM**

Up to 265 lbs. [120 kg]


**CB-HAND - LOCKING HANDLE KITS**

Max. dwr. width 60"

Adds lock-in and lock-out to heavy-duty slides.

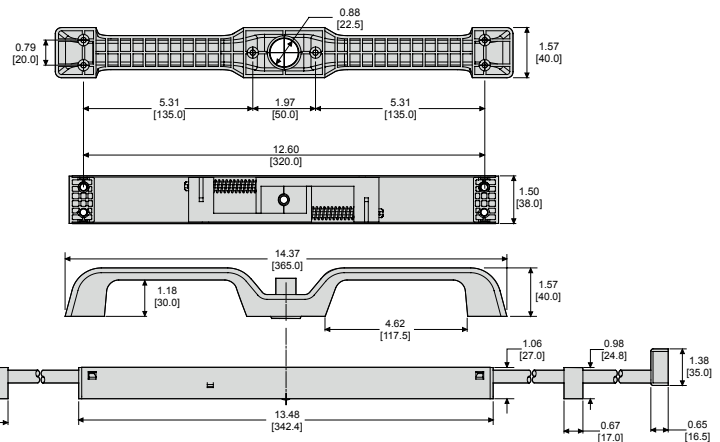**AL4190 - TILT TRACK SYSTEM**

140 lbs./pr.  
Max. dwr. width 40"

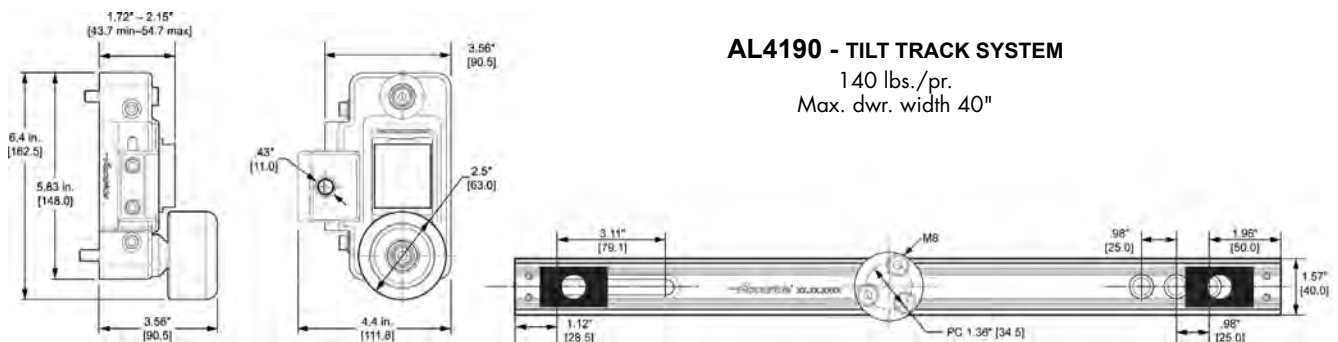

|                                                                                                                       | MODEL             | LOAD RATING                                              | TRAVEL                 | DRAWER WIDTH                         | DETENT  | DISCONNECT | PAGE |
|-----------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------------------------------------|------------------------|--------------------------------------|---------|------------|------|
| <b>Light Duty</b>                                                                                                     | 1029              | 35 lbs.<br>[16 kg]                                       | 3/4                    | 16"<br>[406 mm]                      | –       | Friction   | 11   |
|                                                                                                                       | 2632              | 65 lbs.<br>[30 kg]                                       | Full                   | 16"<br>[406 mm]                      | Hold-in | Rail       | 11   |
|                                                                                                                       | 2132              | 75 lbs.<br>[34 kg]                                       | 3/4                    | 16"<br>[406 mm]                      | Hold-in | Lever      | 11   |
| <b>Medium-Duty Slides</b>                                                                                             | 3732              | 100 lbs.<br>[45 kg]                                      | Full                   | 16"<br>[406 mm]                      | Hold-in | Push Latch | 13   |
|                                                                                                                       | 3135EC            | 100 lbs.<br>[45 kg]                                      | Full                   | 30"<br>[762 mm]                      | Hold-in | Lever      | 14   |
|                                                                                                                       | 3160EC            | 100 lbs.<br>[45 kg]                                      | Full                   | 60"<br>[1524 mm]                     | Hold-in | Lever      | 14   |
|                                                                                                                       | 3832E             | 100 lbs.<br>[45 kg]                                      | Full                   | 16"<br>[406 mm]<br>(varies by model) | Hold-in | Lever      | 15   |
|                                                                                                                       | 3834E             | 100 lbs.<br>[45 kg]                                      | 1" Over<br>[25.4 mm]   | 16"<br>[406 mm]                      | Hold-in | Lever      | 16   |
|                                                                                                                       | 7432              | 100 lbs.<br>[45 kg]                                      | Full                   | 24"<br>[610 mm]                      | Hold-in | Rail       | 17   |
|                                                                                                                       | 7434              | 100 lbs.<br>[45 kg]                                      | 1" Over<br>[25.4 mm]   | 24"<br>[610 mm]                      | Hold-in | Rail       | 17   |
|                                                                                                                       | 3017              | 100 lbs.<br>[45 kg]                                      | 1" Over<br>[25.4 mm]   | 24"<br>[610 mm]                      | Hold-in | Rail       | 17   |
| <b>Heavy-Duty Slides</b>                                                                                              | 4032              | 150 lbs.<br>[68 kg]                                      | Full                   | 27"<br>[686 mm]                      | Hold-in | Rail       | 19   |
|                                                                                                                       | 4033              | 100 lbs.<br>[45 kg]                                      | Full                   | 18"<br>[457 mm]                      | Hold-in | Rail       | 19   |
|                                                                                                                       | 4034              | 150 lbs.<br>[68 kg]                                      | 1.5" Over<br>[38.1 mm] | 24"<br>[610 mm]                      | Hold-in | Rail       | 19   |
|                                                                                                                       | 4035              | 100 lbs.<br>[45 kg]                                      | 1.5" Over<br>[38.1 mm] | 18"<br>[457 mm]                      | Hold-in | Rail       | 19   |
|                                                                                                                       | 3634EC            | 150 lbs.<br>[68 kg]                                      | 1" Over<br>[25.4 mm]   | 42"<br>[1067 mm]                     | Hold-in | Lever      | 20   |
|                                                                                                                       | 3634              | 200 lbs.<br>[91 kg]                                      | 1" Over<br>[25.4 mm]   | 42"<br>[1067 mm]                     | Hold-in | Lever      | 20   |
|                                                                                                                       | 3641 Interlock    | 180 lbs.<br>[82 kg]                                      | 1" Over<br>[25.4 mm]   | 42"<br>[1067 mm]                     | Hold-in | Rail       | 21   |
|                                                                                                                       | 3640A             | 200 lbs. [91kg] Side Mount<br>75 lbs. [34 kg] Flat Mount | 1" Over<br>[25.4 mm]   | 42" [1067 mm]<br>24" [610 mm]        | Hold-in | Rail<br>–  | 21   |
|                                                                                                                       | 3600              | 200 lbs.<br>[91 kg]                                      | Full                   | 42"<br>[1067 mm]                     | Hold-in | –          | 22   |
|                                                                                                                       | 3607 Lock-out     | 200 lbs.<br>[91 kg]                                      | Full                   | 42"<br>[1067 mm]                     | –       | Lever      | 22   |
|                                                                                                                       | 3657              | 200 lbs.<br>[91 kg]                                      | Full                   | 42"<br>[1067 mm]                     | Hold-in | Lever      | 22   |
|                                                                                                                       | 7950              | 350 lbs.<br>[159 kg]                                     | Full                   | 42"<br>[1067 mm]                     | Hold-in | –          | 22   |
|                                                                                                                       | 7957              | 350 lbs.<br>[159 kg]                                     | Full                   | 42"<br>[1067 mm]                     | Hold-in | Lever      | 22   |
|                                                                                                                       | 9301E             | 180-600 lbs. [272 kg]                                    | Full                   | Up to 42"<br>[1067 mm]               | –       | –          | 23   |
|                                                                                                                       | 9307E Lock-out    | 180-600 lbs. [272 kg]<br>Depending on application        | Full                   | Up to 42"<br>[1067 mm]               | –       | –          | 24   |
|                                                                                                                       | 9308E lock-in/out | 180-600 lbs. [272 kg]<br>Depending on application        | Full                   | Up to 42"<br>[1067 mm]               | –       | –          | 24   |
| <b>Note:</b> Super Heavy-Duty Models AL4120 and AL4140 may be found in the Corrosion-Resistant Collection on page 28. |                   |                                                          |                        |                                      |         |            |      |

| MODEL                                       | LOAD RATING           | TRAVEL               | DRAWER WIDTH                                                                     | DETENT                              | DISCONNECT | PAGE |                      |
|---------------------------------------------|-----------------------|----------------------|----------------------------------------------------------------------------------|-------------------------------------|------------|------|----------------------|
| SS2028 Stainless Steel                      | 100 lbs. [45 kg]      | 3/4                  | 18" [457 mm]                                                                     | –                                   | –          | 26   | Corrosion Resistant  |
| SS0330 Stainless Steel                      | 143 lbs. [65 kg]      | Full                 | 18" [457 mm]                                                                     | Hold-in                             | –          | 26   |                      |
| SS5322 Stainless Steel                      | 265 lbs. [120 kg]     | Over                 | 18" [457 mm]                                                                     | Hold-in                             | Bracket    | 27   |                      |
| SS5321 Stainless Steel                      | 350 lbs. [159 kg]     | Over                 | 18" [457 mm]                                                                     | Hold-in                             | –          | 27   |                      |
| AL4120 Aluminium                            | 1,212 lbs. [550 KG]   | 3/4                  | Load based on 24"                                                                | Hold-in                             | –          | 28   |                      |
| AL4140 Aluminium                            | 1,323 lbs. [600 kg]   | Full                 | Load based on 24"                                                                | Hold-in                             | –          | 28   |                      |
| MODEL                                       | MAX. DOOR WEIGHT      |                      | MOUNTING                                                                         | MAX. DOOR SIZE                      |            | PAGE | Flipper Door Slides® |
| 117                                         | 25 lbs. [11 kg]       |                      | Horizontal or Vertical                                                           | 24" w x 36" h<br>[610 mm x 914 mm]  |            | 30   |                      |
| 1145 Over-the-top                           | 30 lbs. [14 kg]       |                      | Horizontal                                                                       | Up to 36"<br>[914 mm] wide          |            | 30   |                      |
| 1155 Easy-Down®                             | 30 lbs. [14 kg]       |                      | Horizontal                                                                       | Up to 48"<br>[1219 mm] wide         |            | 31   |                      |
| 123/1234                                    | 30 lbs. [14 kg]       |                      | Horizontal or Vertical                                                           | 24" w x 42" h<br>[610 mm x 1067 mm] |            | 31   |                      |
| 1321 Pro Pocket                             | 30 lbs. [14 kg]       |                      | Vertical                                                                         | 24" w x 42" h<br>[610 mm x 1067 mm] |            | 32   |                      |
| 1332/1432 Anti-Rak cable                    | 75 lbs. [34 kg]       |                      | Vertical                                                                         | 26" w x 78" h<br>[660 mm x 1981 mm] |            | 33   |                      |
| MODEL                                       | LOAD RATING           | TRAVEL               | DRAWER WIDTH                                                                     | DETENT                              | DISCONNECT | PAGE | Specialty Slides     |
| CB-LIFT-0019 Ascent                         | 14.5 lbs.<br>[6.6 kg] | 22"                  | Push-to-operate mechanical lift for screens up to 17.5" tall and 22" diagonally. |                                     |            | 35   |                      |
| CB3620-258TV - TV Swivel                    | 22.5 lbs.<br>[102 kg] | –                    | Accuride's TV Swivel handles televisions up to 36" diagonally.                   |                                     |            | 35   |                      |
| 2006 Pencil drawer slide                    | 45 lb.<br>[20 kg]     | 3/4                  | 16"<br>[406 mm]                                                                  | –                                   | Friction   | 36   |                      |
| 2109 Suspended drawer slide                 | 75 lbs.<br>[34 kg]    | 3/4                  | 16"<br>[406 mm]                                                                  | Hold-in & Out                       | –          | 36   |                      |
| CBERGO-TRAY 200                             | –                     | 3/4                  | 16"<br>[406 mm]                                                                  | Hold-in & Out                       | –          | 37   |                      |
| CBERGO-TRAY 300 - Deluxe                    | –                     | Full                 | 29.6"<br>[751 mm]                                                                | Hold-in, -out, & intermediate       | –          | 37   |                      |
| 2019 Suspended shelf slide                  | 75 lbs.<br>[34 kg]    | 3/4                  | 16"<br>[406 mm]                                                                  | Hold-in                             | Lever      | 38   |                      |
| 2002 Two-way travel slide                   | 50 lbs.<br>[23 kg]    | 3/4                  | 12"<br>[305 mm]                                                                  | Center                              | –          | 38   |                      |
| 0363 Two-way travel slide                   | 100 lbs.<br>[45 kg]   | Full                 | 18"<br>[457 mm]                                                                  | Center                              | –          | 39   |                      |
| 322 - Pull-out shelf                        | 100 lbs.<br>[45 kg]   | .88" over<br>[22 mm] | 16"<br>[406 mm]                                                                  | –                                   | –          | 40   |                      |
| 340 - Butcher block slide                   | 110 lbs.<br>[50 kg]   | Full                 | 18"<br>[457 mm]                                                                  | –                                   | Bracket    | 40   |                      |
| 301-2590 Pull-out storage slide             | 155 lbs.<br>[70 kg]   | .83" over<br>[21 mm] | 16"<br>[406 mm]                                                                  | Hold-in                             | –          | 41   |                      |
| 3600-200/3600-201 StowAway slides           | 175 lbs.<br>[79 kg]   | Full                 | 20"<br>[508 mm]                                                                  | –                                   | Lever      | 41   |                      |
| 115RC Linear Motion track system            | 265 lbs.<br>[120 kg]  | 265 lbs.<br>[120 kg] | –                                                                                | –                                   | –          | 42   |                      |
| 116RC Heavy-Duty Linear Motion track system | 794 lbs.<br>[360 kg]  | 265 lbs.<br>[120 kg] | –                                                                                | –                                   | –          | 42   |                      |
| CB-HAND Locking Handle Kit                  | Dependent on slide    | –                    | Up to 60"<br>[1.5 m]                                                             | –                                   | –          | 43   |                      |
| AL4190 Tilt-Track system                    | 140 lbs.<br>[65 kg]   | Extends & tilts down | Up to 40"<br>[1016 mm]                                                           | –                                   | –          | 44   |                      |



## Light-Duty Slides

35–75 Pounds

Up to 16 Inch Drawer Widths

### SPECIFICATIONS

- 3/4 extension
- Drawers up to 16" [406 mm] wide
- Friction disconnect
- Steel ball bearings
- Lengths 13"-27" [330-685 mm]
- Clear zinc or black finish

### SPECIAL FEATURES


- Single slide center-mounted under drawer
- Eliminates side space requirements

#### Adjustable rear mounting bracket:

P/N 4010-0157-CE


#### Reversed rear mounting bracket:

P/N 4010-0353-CE



## 1029

35-lb. [16 kg] load rating

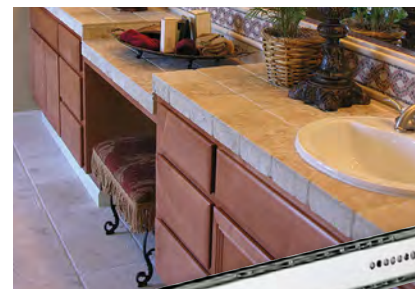


A concealed undermount slide for small, shallow drawers in light-duty applications.

### SPECIFICATIONS

- Full extension
- .50" [12.7 mm] side space
- Drawers up to 16" [406 mm] wide
- Rail mount/disconnect
- Steel ball bearings
- Even lengths 8"-22" [203-559 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Lowest profile rail mount
- Hold-in detent to prevent drawer roll-out and bounce-back
- Silenced in and out
- 32 mm and traditional hole pattern

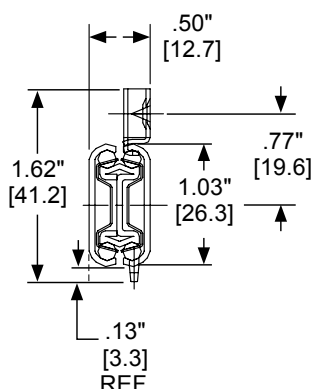

## 2632

65-lb. [30 kg] load rating




Suitable for light-duty commercial or residential use: store fixtures, lab furniture, and kitchen box drawers.

### SPECIFICATIONS

- 3/4 extension
- .50" [12.7 mm] side space
- Drawers up to 16" [406 mm] wide
- Lever disconnect
- Steel ball bearings
- Lengths 10"-28" [250-700 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Low profile
- Hold-in detent
- Cam Drawer Adjust
- 32 mm and traditional hole pattern



Optional Face Frame Bracket Kit

## 2132

75-lb. [34 kg] load rating



Use in small shallow drawers intended for office supplies or kitchen utensils in commercial or residential applications.

#### Optional face frame bracket kit:

P/N 4180-0321-XE

#### Pilaster mounting kit:

P/N 4180-0266-XE

#### Clip-on Bracket (zinc):

P/N 5410-08XX (varies by length)





## Medium-Duty Slides

90–100 Pounds



16–60 Inch Drawer Widths

**3732**

100-lb. [45 kg] load rating



*This low profile slide has a convenient face frame mounting hole at the front of the slide. Ideal for kitchen, bathroom, or institutional box drawers.*

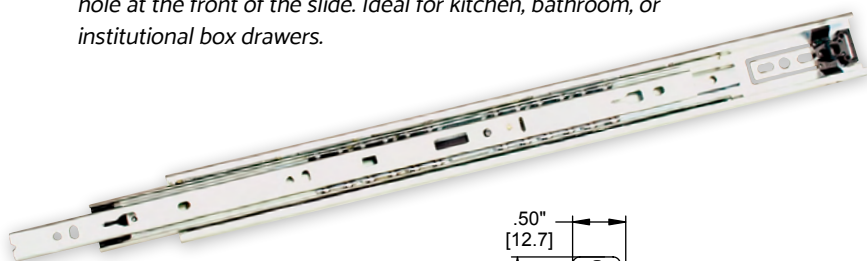

- Hold-in detent to prevent drawer roll-out and bounce-back
- Enhanced silencing in and out
- 32 mm and traditional hole pattern
- Front face frame mounting hole

**Optional rear face frame bracket mounting kit:**

P/N 4180-0431-XE

**Clip-on Bracket:**

P/N 5410-08XX (varies by length)



Rear  
Face Frame  
Bracket

**SPECIFICATIONS**

- Full extension
- .50" [12.7 mm] side space
- Drawers up to 16" [406 mm] wide
- Unhanded push latch disconnect
- Ball bearings:
  - Zinc and black finish-steel
  - White finish-steel and polymer
- Even lengths 12"-28" [305-711 mm]
- Clear zinc, white, or black finish
- Available in Production Packaging (FP)

**SPECIAL FEATURES**

- Lowest profile side mount slide

**SAVE TIME!**


Production packaging (FP)  
Available for all lengths



Slides are shipped with the drawer members disconnected from the cabinet members. The two types of members are packaged separately within the same box, allowing the drawer members to be distributed to a different area of the shop for installation.

## 3135EC Eclipse/3160EC

100-lb. [45 kg] load rating

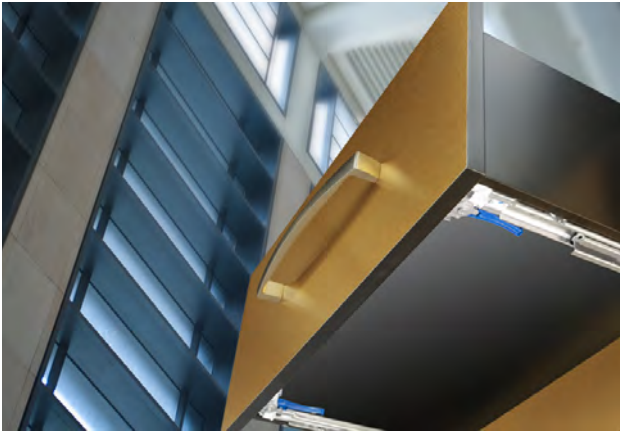

The Eclipse undermount offers a durable concealed slide solution for both commercial and residential installations.

### SPECIFICATIONS

- Full extension
- Front lever disconnect
- Steel and polymer ball bearings
- Even lengths 12"-28" [305-711 mm], 15" [381 mm] and 21" [533 mm]
- Clear zinc finish

### SPECIAL FEATURES

- Easy-Close action brings drawers to a gentle close
- Face frame and frameless compatible
- 1/4-turn cam lock to secure drawer front position
- Vertical, horizontal and front-to-back drawer front adjustment
- 32 mm and traditional hole pattern

### 3135EC

- ADA Compliant
- Drawers up to 30" wide
- Optional rear face frame bracket provides 2" of depth adjustment.

### 3160EC

- Drawers up to 60" wide
- Cable system for drawers 31"- 40" (only)
- Additional Stabilizer Kit and cable system required for drawers 41"- 60"

### 3135EC - EASY-CLOSE



- Brings drawers to a gentle close



**cam**  
DRAWER  
ADJUST

**BHMA**  
CERTIFIED  
Be Safe. Be Secure. Look for the Mark.

**AWI** ARCHITECTURAL  
WOODWORK  
INSTITUTE

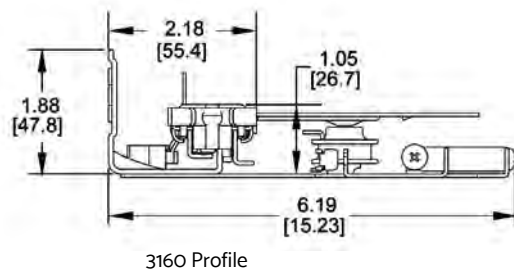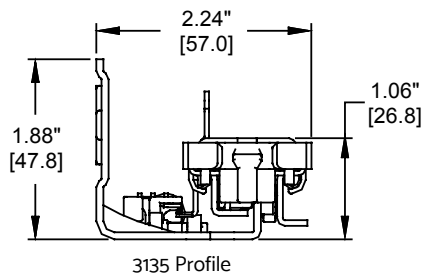

### OPTIONAL KITS

#### Compatible with 3135EC Only

- P/N 4180-0656-XE - Slotted Rear Face Frame Bracket
- P/N 4180-0568-XE - Drill Jig
- P/N 4180-0569-XE - Bottom Mount Bracket
- P/N 4180-0603-XE - Tool Kit
- P/N 4180-0604-XE - Inset Face Frame Bracket
- P/N 4180-0605-XE - Inset Face Frame Bracket (Bottom)

#### Compatible with 3160EC Only

- PN 4180-0753-XE - Wide Drawer Stabilizer kit

#### Compatible with 3135EC and 3160EC


- PN 4180-0747-XE - Standard Lever Disconnect

## 3832E Family

90-100-lb. [41-45 kg] load rating



This group of products offers a number of options including self-closing, detent out, weather-resistant, touch release, and easy-close.

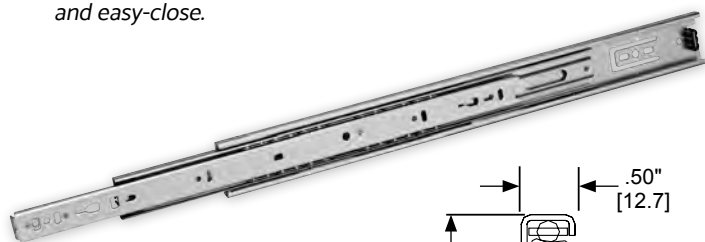

### SPECIFICATIONS

- Full extension
- .50" [12.7 mm] side space
- Drawers up to 16" [406 mm] wide\*\*
- Lever disconnect
- Ball bearings:
  - Zinc and black finish-steel
  - White finish-steel and polymer
- Clear zinc, black, or white finish\*\*

### SPECIAL FEATURES

- Hold-in detent to prevent drawer roll-out and bounce-back
- Cam Drawer Adjust
- Easy access to mounting holes
- Silenced in and out
- 32 mm and traditional hole pattern

\*\* Vary by model.

**3832ETR**  
eliminates the need  
for knobs or pulls.



**CH3832** is ideal for  
environments sub-  
jected to  
indirect humidity.

### Optional accessories for pilaster and face frame mounting:

**P/N 4180-0266-XE**

Pilaster kit

**P/N 4180-0752-XE**

Rear Face frame kit

### 3832ETR/3832EHDTR

**P/N 4180-0758-XE**

Face frame kit

### 3832EC

**P/N 4180-0745-XE**

Rear face frame kit

### Clip-on Bracket

Compatible with 3832E, 3832EDO,  
3832ESC, 3832EHDSC and CH3832

**P/N 5410-08XX** (varies by length)



### SAVE TIME!

Production  
packaging (FP)

Model 3832E  
10"-28" LENGTHS

Model 3834E  
ALL LENGTHS

Slides are shipped with the drawer members disconnected from the cabinet members. The two types of members are packaged separately within the same box, allowing the drawer members to be distributed to a different area of the shop for installation.



## A host of options to suit a variety of applications...

### Enhanced 3832E-Classic

- Drawers up to 24" [610 mm] wide
- Even lengths 6"-28" [148-700 mm]
- Lengths 10"-28" available in Production Packaging (FP)

### Enhanced 3834E-Over Travel

- 100-lb. [41 kg] load rating
- 1" [25.4 mm] over travel
- Even lengths 12"-28" [300-700 mm]
- Available in Production Packaging (FP)

### Enhanced 3832ESC-Self-Closing\*

- Self-closing device ensures drawer closure
- Even lengths 12"-28" [300-700 mm]

### Enhanced 3834ESC-Self-Closing\*

- 90-lb. [41 kg] load rating
- Self-closing device ensures drawer closure
- 1" [25.4 mm] over travel
- Even lengths 14"-28" [350-700 mm]

### Enhanced 3832EHDSC-Heavy-Duty SC\*

- Self-closing device has heavier spring for stronger hold-in action
- Even lengths 12"-28" [300-700 mm]

### Enhanced 3832EDO-Detent Out

- Special detent out to hold drawers or pull-out shelves in an open position.
- Even lengths 10"-28" [199-700 mm]

### Enhanced 3832ETR-Touch Release Enhanced 3832EHDTR-Heavy-Duty TR

- These products hold drawers or roll-out shelves in a closed position until activated by touch.
- Even lengths 12"-28" [300-700 mm]

### Enhanced CH3832-Weather Resistant

- Drawers up to 24" [610 mm] wide
- Special coating provides eight times more protection than standard zinc finish.
- Stainless steel ball retainer, ball bearings, and rivets
- Even lengths 10"-28" [199-700 mm]

### Enhanced 3832EC-Easy-Close\*

- Brings drawers to a gentle close
- Front face frame mounting hole
- Even lengths 14"-28" [350-705 mm]
- Not available in white finish

\* Due to the self-closing feature, a stronger pull force is required to open drawers.



ARCHITECTURAL  
WOODWORK  
INSTITUTE

Models 3832E, CH3832, 3832EDO, 3832ETR, 3832EHDTR

## 7432/7434

100-lb. [45 kg] load rating



The top-quality choice for file, desk, and storage drawers in commercial or residential applications.

**cam**  
DRAWER  
ADJUST




**BHMA**  
CERTIFIED

**AWI** ARCHITECTURAL  
WOODWORK  
INSTITUTE

### SPECIFICATIONS

- .50" [12.7 mm] side space
- Drawers up to 24" [610 mm] wide
- Rail mount/disconnect
- Steel ball bearings
- Even lengths 12"-28" [300-700 mm]
- Clear zinc or black finish



### SPECIAL FEATURES

- Progressive movement
- Hold-in detent to prevent drawer roll-out and bounce-back
- Cam Drawer Adjust
- 32 mm and traditional hole pattern

### 7432

- Full extension

### 7434

- 1" [25.4 mm] over travel



## 3017

100-lb. [45 kg] load rating




Furniture by [www.diamondcase.com](http://www.diamondcase.com)

The rail/mount disconnect and polymer ball bearings provide smooth and quiet operation for wider desk and credenza drawers.

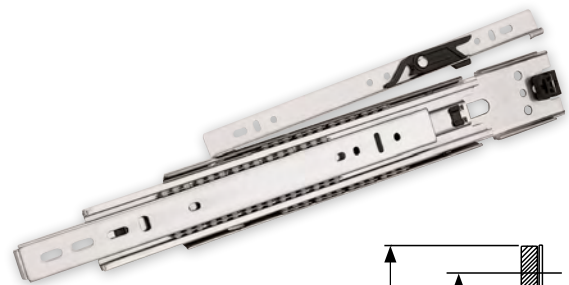

### SPECIFICATIONS

- 1" [25.4 mm] over travel
- .50" [12.7 mm] side space
- Drawers up to 24" [610 mm] wide
- Rail mount/disconnect
- Polymer ball bearings
- Hold-in detent to prevent drawer roll-out and bounce-back
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

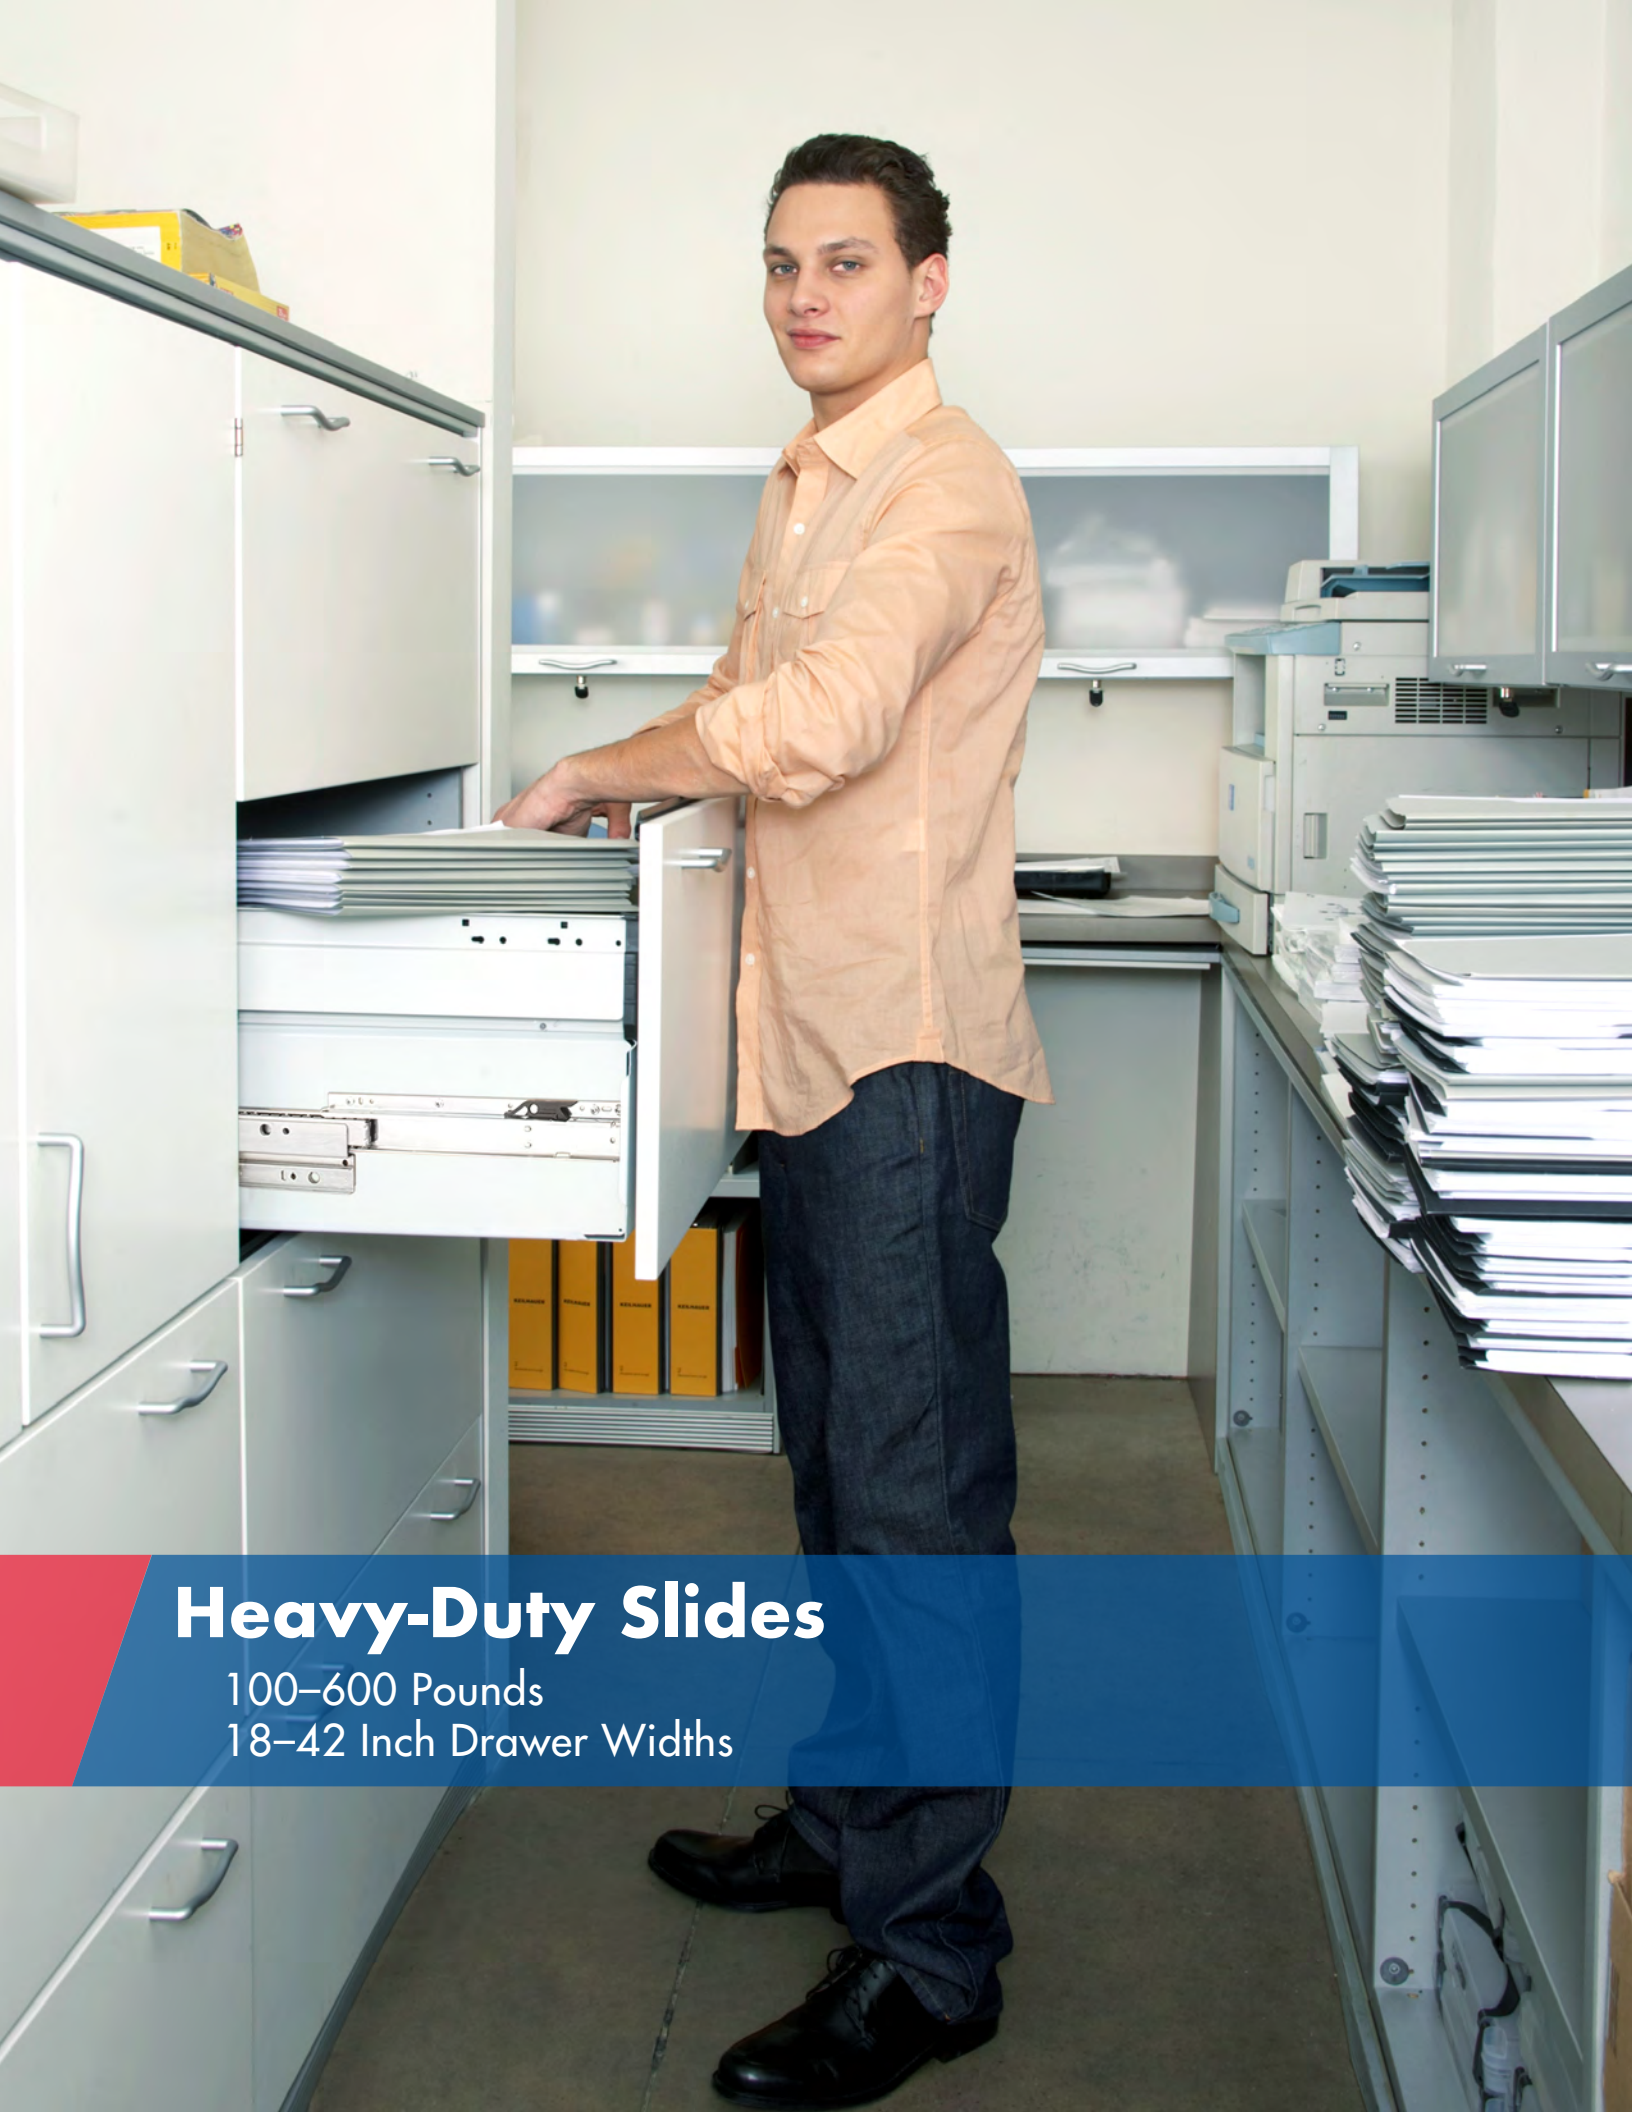

## Heavy-Duty Slides

100–600 Pounds


18–42 Inch Drawer Widths

## 400 series

100-150-lb. [45-68 kg] load rating



Smooth and quiet operation for deep drawers.

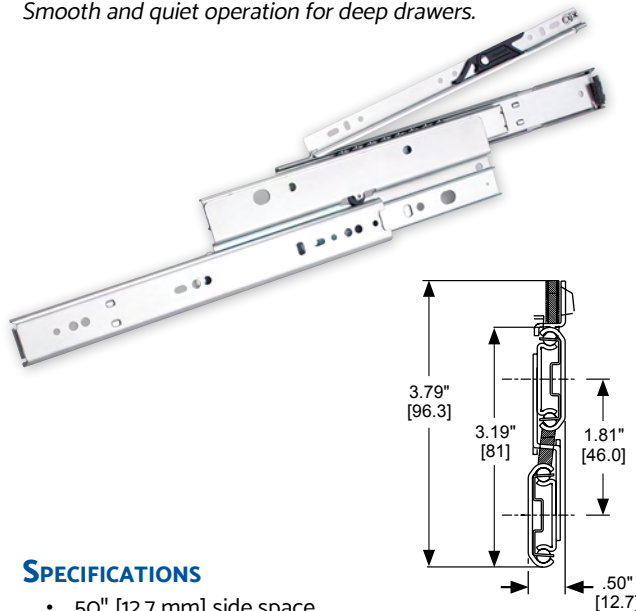

### SPECIFICATIONS

- .50" [12.7 mm] side space
- Rail mount/disconnect
- Even lengths 12"-28" [305-700 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Progressive movement
- Hold-in detent to prevent drawer roll-out and bounce-back
- Cam Drawer Adjust
- Silenced in and out
- 32 mm and traditional hole pattern

### 4032-For wider drawers

- Drawer widths up to 27" [686 mm]
- 150-lb. [68 kg] load rating
- Full extension
- Steel ball bearings

### 4033

- Drawer widths up to 18" [457 mm]
- 100-lb. [45 kg] load rating
- Full extension
- Polymer ball bearings  
(Not recommended for lateral files)

### 4034-OVER TRAVEL WITH A HIGHER LOAD

- Drawer widths up to 24" [610 mm]
- 150-lb. [68 kg] load rating
- 1.5" [38.1 mm] over travel
- Steel ball bearings

### 4035-OVER TRAVEL

- Drawer widths up to 18" [457 mm]
- 100-lb. [45 kg] load rating
- 1.5" [38.1 mm] over travel
- Polymer ball bearings  
(Not recommended for lateral files)




## 3634EC/3634

150-200-lbs. [68-91 kg] load rating



For wide drawers, trays and storage bins with heavy loads.



### SPECIFICATIONS

- 1" [25.4 mm] over travel
- .78" [19.8 mm]
- Lever disconnect
- Drawers up to 42" [1067 mm]
- Steel ball bearings
- Clear zinc (C) or electroplate black (CB)

### SPECIAL FEATURES

- Outer member hole pattern matches 3832E/3834E
- Unhanded slides



**3634EC**

Easy-Close

### 3634EC EASY-CLOSE

- Brings drawers to a smooth, gentle close.
- 150-lbs. [68 kg] load rating
- Polymer out-stops for quiet operation
- Even lengths 14"-28" [356-700 mm]



**3634**


### 3634

- May be side or flat mounted
  - 200 lbs. [91 kg] side mount
  - 75 lbs. [34 kg] under/flat mount
- In-and-out stops silenced for quiet operation
- Even lengths 12"-28" [305-711 mm]

**Note:** The 14" length is full extension only



Specialty Casework

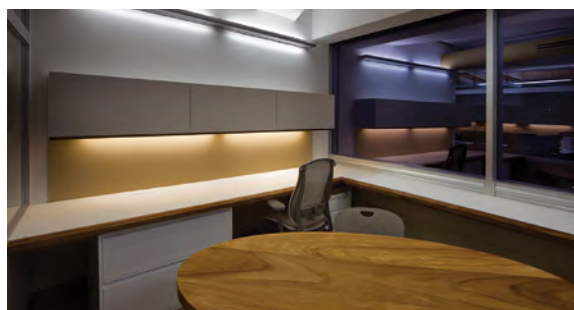

Business and Commercial Storage



Residential and Industrial Storage

**3641**

180-lb. [82 kg] load rating



*Suitable for commercial or residential filing cabinet drawers requiring interlock.*



**Model 3642 Companion Slide**  
See technical sheet for details

**SPECIFICATIONS**


- 1" [25.4 mm] over travel
- .89" [22.6 mm] side space
- Drawers up to 42" [1067 mm] wide
- One piece rail-and-pocket mount/disconnect system
- Steel ball bearings
- Even lengths 14"-28" and 17" [353-709 and 429 mm]
- Clear zinc or black finish

**SPECIAL FEATURES**

- Front location of interlock eliminates reaching during installation
- Interfaces with central locking system
- Cut-to-length aluminum connecting rods
- Hold-in detent to prevent drawer roll-out and bounce-back
- Silenced in and out
- 32 mm and traditional hole pattern

**Optional gang locking system:**



P/N 4180-0345-XE

**3640A**

200-lb. [91 kg] load rating



*Can be side or flat mounted. Recommended for wider lateral file drawers.*

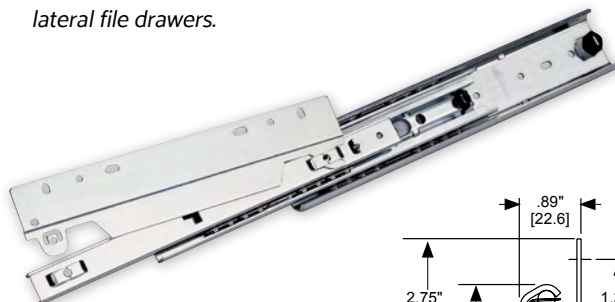**SPECIFICATIONS**

- 1" [25.4 mm] over travel
- .89" [22.6 mm] side space
- Adapter rail mount/disconnect
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

**SPECIAL FEATURES**

- Dual mounting options:
  - 200 lb. [91 kg] side mount
    - drawer width 42" [1067 mm]
  - 75 lb. [34 kg] under/flat mount
    - drawer width 24" [610 mm]
- Hold-in detent to prevent drawer roll-out and bounce-back
- 32 mm hole pattern

## 3600 Series

200-lb. [91 kg] load rating



Used for shelving units, bins, trays or wide storage drawers in commercial or residential settings.


### COMMON FEATURES

- Full extension
- .75" [19.1 mm] side space
- Drawers up to 42" [1067 mm] wide
- Even lengths 12"-28" [305-711 mm]
- Clear zinc finish




### 3600

- Non-disconnect
- Hold-in detent




### 3607

- Lever disconnect
- Lock-out holds drawers and trays open in a safe and stable position for access



### 3657

- Lever disconnect
- Hold-in detent



## 7950/7957

350-lb. [159 kg] load rating\*



An intermediate load-rating choice for wide drawers in kitchens, store fixtures, or institutional storage applications.




### SPECIFICATIONS

- Full extension
- .75" [19.1 mm] side space
- 7950: non-disconnect  
7957: handed lever disconnect
- Accommodates drawers up to 42" [1067 mm] wide
- Steel ball bearings
- Even lengths 12"-36" [305-914 mm]
- Clear zinc finish


### SPECIAL FEATURES

- May be side or flat mounted:
  - Side mount load capacity up to 350 lbs. [159 kg].
  - Flat mount load capacity up to 150 lbs. [68 kg].
- Bridged ball retainer design prevents retainer migration.

\* Load rating based on a pair of 18" slides on a 42" wide drawer, cycled 10,000 times.



**7957**  
Handed Lever  
Disconnect




**7950**  
Non-Disconnect

## Enhanced 9301E

150-600-lb. [68-272 kg] load rating\*



*Well suited for large pantry pull-outs, vehicular storage, or other drawers with a heavier load.*



### SPECIFICATIONS

- Full extension
- .75" [19.1 mm] side space
- Non-disconnect
- Silenced in and out
- Steel ball bearings
- Includes square carriage bolt holes
- Even lengths 10"-36", 40", 42", 44", 48", 54" and 60" [254-914, 1016, 1067, 1118, 1219, 1372 and 1524 mm]
- Clear zinc finish

### LOAD RATINGS\*

**Flat mount:** 180 lb. [81 kg]

Drawer widths up to 32" [813 mm]

**Mobile applications:** 360 lb. [163 kg]

Drawer widths up to 32" [813 mm]

**Frequent usage:** 480 lb. [217 kg]

Drawer widths up to 42" [1067 mm]

**Moderate usage:** 600 lb. [272 kg]

Drawer widths up to 24" [610 mm]

**Bracket-mounted:** 420 lb. [190 kg]

Drawer widths up to 42" [1067 mm]


**Bracket-mounted:** 600 lb. [272 kg]

Drawer widths up to 22" [559mm]


### ACCESSORY PLATFORM BRACKET KITS

- Provides six additional mounting configurations
- Available in lengths of 12", 16", 22", and 28" [305, 406, 559, and 711 mm]
- Four bracket lengths have been designed to be used individually or in combination to accommodate all slide lengths.
- See technical sheet or [www.accuride.com](http://www.accuride.com) for bracket kit ordering information.
- Clear zinc finish

### Four Bottom-Mount Options

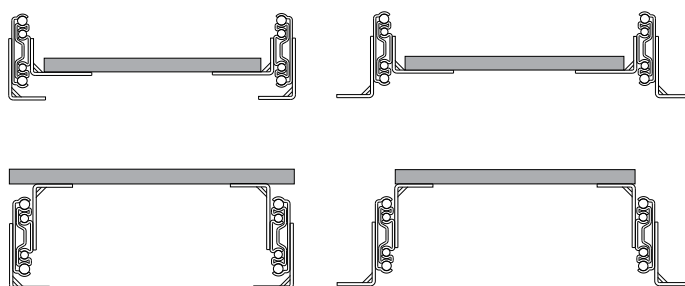

### Two Side-Mount Options

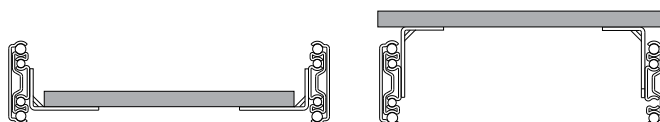



## Enhanced 9307E Lock-out

Heavy duty with a lock-out for applications where secure access to drawers and trays adds a measure of safety.



## Enhanced 9308E Lock-in & Lock-out

Lock-in and lock-out features to ensure drawers stay securely closed during transit in applications such as utility vehicles.



### COMMON FEATURES

- Full extension
- .75" [19.1 mm] side space
- Non-disconnect
- Lock-in/Lock-out actuated with latch at front of slide
- Compatible with optional platform brackets (see Model 9301E)
- For locking on one side only, order non-locking companion slide Model 9301E
- Available in even lengths 12"-36", 40", 42", 48", 54", 60" [305-914 mm, 1016 mm, 1066 mm, 1219 mm, 1372 mm, 1524 mm]

**NOTE:** Special packaging is available which includes one standard 9301E and one right-hand 9308E. Available lengths: 14"-32", 36", 40", 48", 54" and 60". The part number for this packaging is 9308-E5.

### LOAD RATINGS

- Mobile applications:
  - 360 lbs. [163 kg]\*
  - Drawer widths up to 32" [813 mm]
- Frequent usage:
  - 480 lbs. [217 kg]\*\*
  - Drawer widths up to 42" [1067 mm]
- Moderate usage:
  - 600 lbs. [272 kg]\*
  - Drawer widths up to 24" [609 mm]

\* Load ratings based on 10,000 cycle test

\*\* Load rating based on 75,000 cycle test

**NOTE:** See product technical sheet for cycle testing data.



**Caution:** This slide must never be used as a pull-out step, platform or any other application supporting human weight, as injury may result.



## Corrosion-Resistant Slides

100–1,323 Pounds

18–24 Inch Drawer Widths

**SS2028****Stainless Steel Slide**

100-lb. [45 kg] load rating\*



With the narrowest side space of the group, this model provides an advantage in installations where space must be maximized.

**SPECIFICATIONS**

- 3/4 extension
- .38" [9.5 mm] side space
- Drawer widths up to 18" [457 mm]
- Non-disconnect
- Stainless steel ball bearings
- Lengths 12"-28" [300-700 mm]\*\*
- Stainless steel

**SPECIAL FEATURES**

- Hold-in detent
- Corrosion resistant

**SS0330****Stainless Steel Slide**

143-lb. [65 kg] load rating\*



Providing a load capacity on the lighter side of the heavy-duty category, this slide is for heavier drawers or pull-out shelves in applications that require full extension.

**SPECIFICATIONS**

- Full extension
- .75" [19.1 mm] side space
- Drawer widths up to 18" [457 mm]
- Non-disconnect
- Stainless steel ball bearings
- Lengths 12"-24" [300-600 mm], plus 28" [700 mm]\*\*
- Stainless steel

**SPECIAL FEATURES**

- Hold-in detent
- Corrosion resistant

\* Load rating based on 18" slides in 18" drawers cycled 80,000 times.


\*\* The lengths indicated in inches are approximate conversions from the metric measurements. Please see technical sheet for exact dimensions.

**SS5322****Stainless Steel Slide**

265-lb. [120 kg] load rating\*



The unique features on this model are over travel, for complete access to contents, and bracket mounting, which provides a disconnect method.

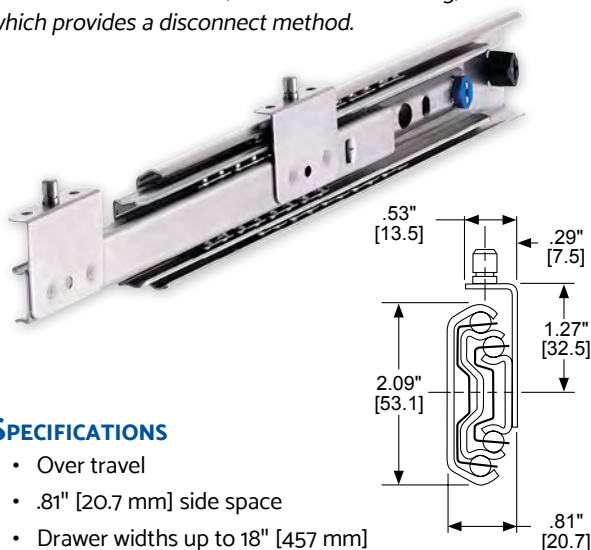**SPECIFICATIONS**

- Over travel
- .81" [20.7 mm] side space
- Drawer widths up to 18" [457 mm]
- Bracket disconnect
- Stainless steel ball bearings
- Lengths 12"-24" [300-600 mm], plus 28" [700 mm] and 31" [790 mm]\*\*
- Stainless steel

**SPECIAL FEATURES**

- Hold-in detent
- Corrosion resistant
- Easy-mount brackets with locator pins to simplify disconnect.

**SS5321****Stainless Steel Slide**

350-lb. [159 kg] load rating\*



The most heavy-duty performer of the group, this slide offers a slightly narrower profile, over travel, and the greatest load rating of the collection.

**SPECIFICATIONS**

- Over travel
- .75" [19.1 mm] side space
- Drawer widths up to 18" [457 mm]
- Non-disconnect
- Stainless steel ball bearings
- Lengths 12"-24" [300-600 mm], plus 28" [700 mm] and 31" [790 mm]\*\*
- Stainless steel

**SPECIAL FEATURES**

- Hold-in detent
- Corrosion resistant

\* Load rating based on 18" slides in 18" drawers cycled 80,000 times.


\*\* The lengths indicated in inches are approximate conversions from the metric measurements. Please see technical sheet for exact dimensions.

**AL4120****Super Heavy-Duty Aluminum Slide**

1,212-lb. [438 kg] load rating\*



Super heavy duty,  $\frac{3}{4}$  extension slide in lightweight aluminum that offers corrosion resistance.

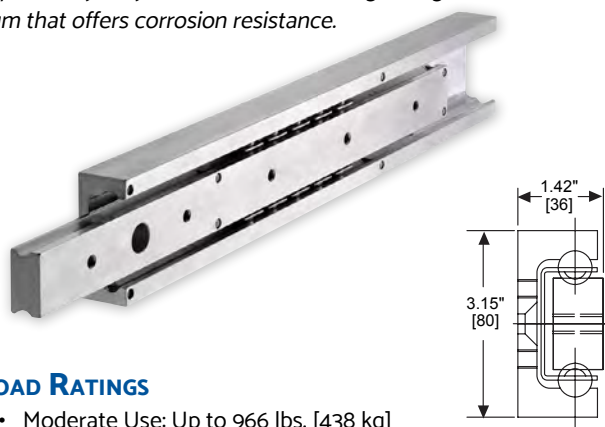**LOAD RATINGS**

- Moderate Use: Up to 966 lbs. [438 kg]  
Load rating based on a pair of slides spaced 24" apart and tested to 10,000 cycles.
- Light Use: Up to 1,212 lbs. [550 kg]  
Load rating based on a pair of slides spaced 24" apart and tested to 5,000 cycles.

**SPECIFICATIONS**

- $\frac{3}{4}$  extension
- 1.42" [36 mm] side space
- Non-disconnect
- Stainless steel ball bearings
- Lengths: 16", 20", 24", 28", 32", 36", 40", 44", and 48" [400, 500, 600, 700, 800, 900, 1000, 1100, and 1200 mm]\*

**SPECIAL FEATURES**


- Manufactured with lightweight aluminum, with stainless steel ball bearings and ball retainers to provide corrosion resistance and strength without the additional weight of steel slides.

**AL4140****Super Heavy-Duty Aluminum Slide**

1,323-lb. [600 kg] load rating\*



Super heavy duty, with full extension in lightweight aluminum that offers corrosion resistance.

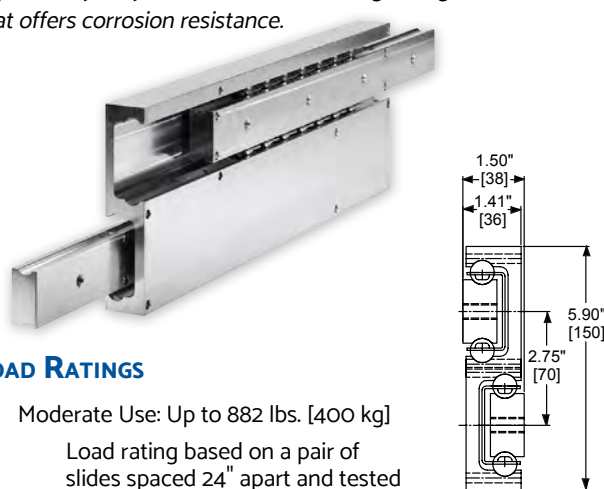**LOAD RATINGS**

- Moderate Use: Up to 882 lbs. [400 kg]  
Load rating based on a pair of slides spaced 24" apart and tested to 10,000 cycles.
- Light Use: Up to 1,323 lbs. [600 kg]  
Load rating based on a pair of slides spaced 24" apart and tested to 5,000 cycles.

**SPECIFICATIONS**

- Full extension
- 1.5" [38 mm] side space
- Non-disconnect
- Stainless steel ball bearings
- Lengths: 16", 20", 24", 28", 32", 36", 40", 44", and 48" [400, 500, 600, 700, 800, 900, 1000, 1100, and 1200 mm]\*

**SPECIAL FEATURES**

- Manufactured with lightweight aluminum, with stainless steel ball bearings and ball retainers to provide corrosion resistance and strength without the additional weight of steel slides.

\*\* The lengths indicated in inches are approximate conversions from the metric measurements. Please see technical sheet for exact dimensions.




**Flipper Door Slides®**  
25–75 Pounds

## 117

25-lb. [11 kg] load rating



Suitable for entertainment cabinets and office storage doors.

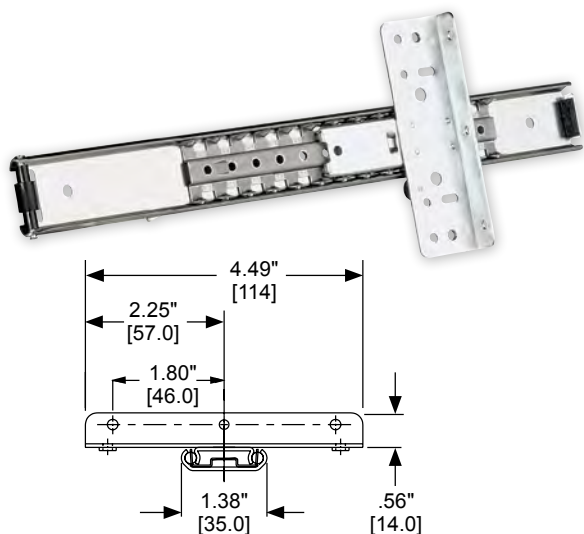

### SPECIFICATIONS

- Doors up to 24"w x 36"h [610 mm x 914 mm]
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Optional detent-out feature prevents door sag
- No partition required
- Silenced in and out

Horizontal mounting requires pivot roller kit:


P/N 4180-0302-XE

## 1145

30-lb. [14 kg] load rating



Medium duty for armoires, storage cabinets, and entertainment center doors.

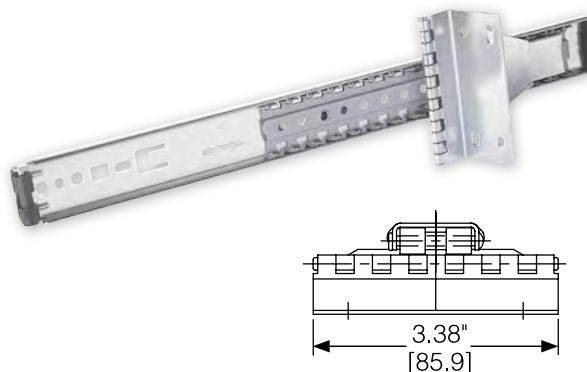

### SPECIFICATIONS

- 36" [914 mm] maximum door width
- Steel and polymer ball bearings
- Lengths 10"-24" [252-608 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Minimum door racking
- Pin hinge included

Mounting bracket kit (zinc):

P/N 4180-0325-XE

Mounting bracket kit (black):


P/N 4180-0326-XE

## 1155 Easy-Down®

30-lb. [14 kg] load rating



The Easy-Down® has a motion control system to ensure overhead doors close safely.

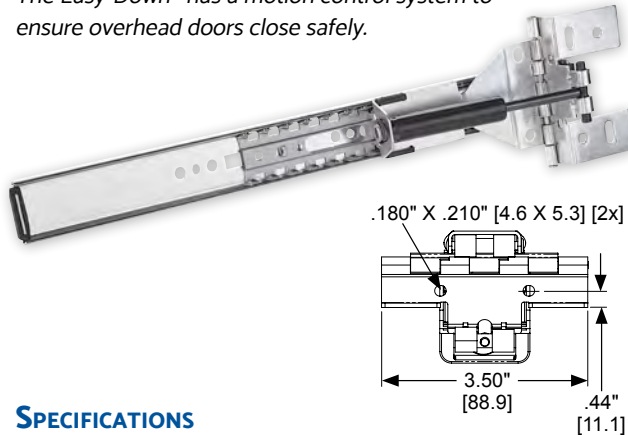

### SPECIFICATIONS

- Accommodates door widths up to 48" [1219 mm]
- Steel ball bearings
- Even lengths 12"-24" [303-608 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Over-the-top design provides no loss of normal storage space
- Protects user from rapid drop of door
- Door closing speed remains similar on both light and heavy doors
- Easy installation—requires few or no cabinet modifications
- Cylinder cover cap provides a finished look (not shown)
- P/N 4180-0325-XE

### Mounting bracket kit (black):


P/N 4180-0326-XE

## 123/1234

30-lb. [14 kg] load rating



Accommodates taller kitchen cabinet and entertainment center doors.

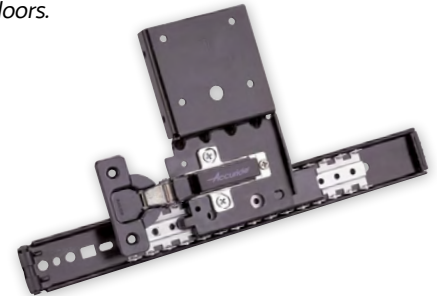

### SPECIFICATIONS

- Doors up to 24" [610 mm] wide by 42" [1067 mm] tall
- Hold-out detent
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]

123-35 mm inset hinges included

Black zinc finish—slides and hinges

1234-Hinges purchased separately

Black zinc finish—slides only

### OPTIONAL HINGE KITS

P/N 4180-0391-XE


35 mm hinge

P/N 4180-0314-XE

Overlay (40 mm)

P/N 4180-0313-XE

Thick door (40 mm)

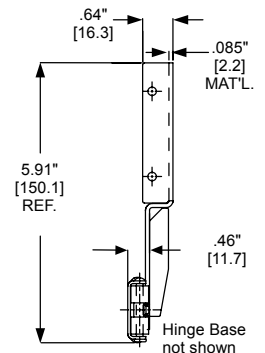

The cylinder for the Easy-Down® is covered by a five year limited warranty.

## 1321 Pro Pocket

30-lb. [14 kg] load rating



The Pro Pocket is a full 3/4-inch overlay Flipper Door Slide® with special features that virtually eliminate door damage.

### MODEL 1321

- Full 3/4" Overlay
- Flipper Door Slide®





### SPECIFICATIONS

- Doors up to 42" [1067 mm] tall by 24" [610 mm] wide
- Steel ball bearings
- Even lengths 16"-28" [405-710 mm]
- Black electroplate finish

### SPECIAL FEATURES

- Attached brackets provide easy partition installation and removal
- Auto-open feature pushes cabinet doors open the last 1-1/4" [32 mm] of travel to ensure doors are fully extended
- Skid blocks with indexing marks ease installation, and protect door face, top, and bottom
- Cover caps provide aesthetic finish

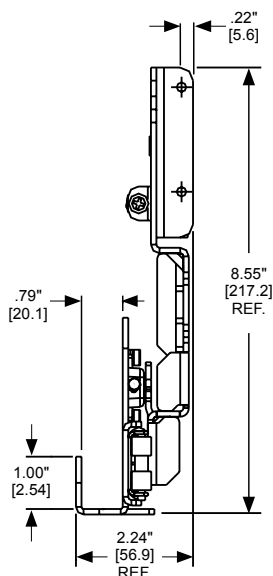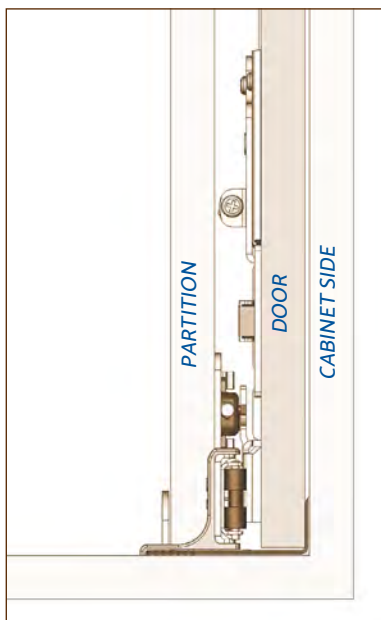


## 1332/1432 Anti-Rak Cable System

75-lb. [34 kg] load rating




These slides are designed for taller, heavier doors used on armoires, or audio/visual and home entertainment cabinetry.

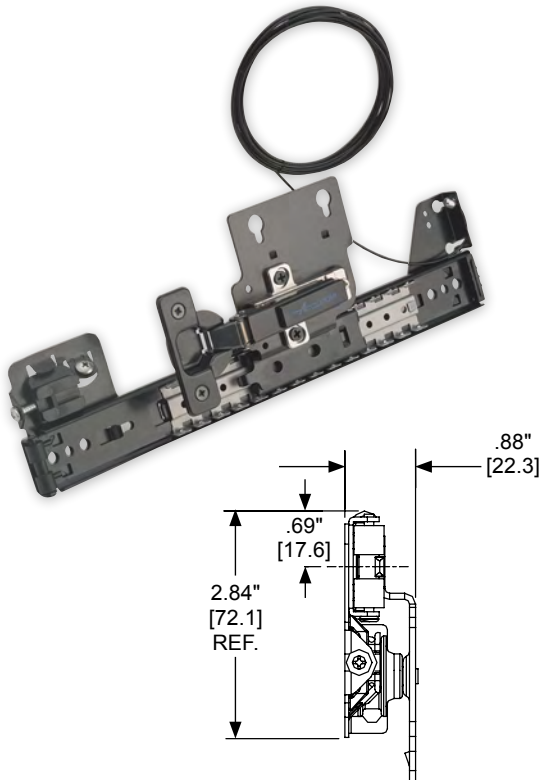

**1332**—35 mm inset hinges included

**1432**—Hinges purchased separately

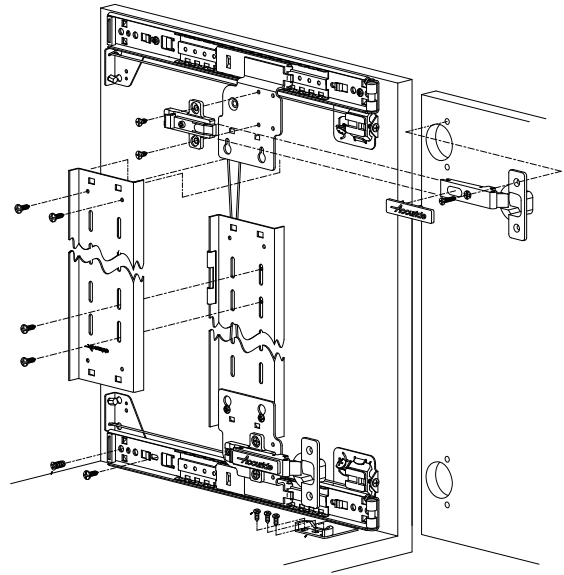

### SPECIFICATIONS

- Door heights up to 78" [1981 mm]
- Door widths to 26" [660 mm]
- For doors 36"-78" [914-1981 mm] tall additional hinges required—see below
- Lengths 12"-32" [303-813 mm]
- Hold-out detent
- Silenced in and out
- Steel ball bearings
- Standard black or optional clear zinc finish

### Hinge Carrier Strip Kit:

(required for doors 36"-78" tall [914-1981 mm])

P/N 4180-0408-XE - Black finish

P/N 4180-0410-XE - Zinc finish

### Connector Clip Kit (to join carrier strips):

P/N 4180-0412-XE

### Optional 40 mm hinge kits:

P/N 4180-0292-XE

7/16" overlay for doors up to 3/4" [19.1 mm]

P/N 4180-0394-XE

Thick doors up to 1-1/4" [31.8 mm]

### Extra Hinge Kit (35 mm inset):

P/N 4180-0407-XE - Black finish

P/N 4180-0389-XE - Zinc finish




# Specialty Slides

14.5–265 Pounds

## CB Lift-0019 – Ascent

14.5-lb. [6.6 kg] load rating

The Ascent is a push-to-operate mechanical lift that provides access and conceals screens in desks and other cabinetry.

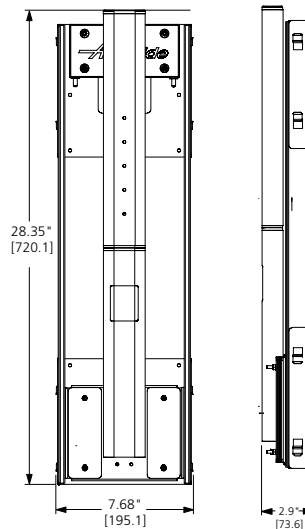

### SPECIFICATIONS

- Accommodates screens from 5.5–14.5 pounds [2.5–6.6 kg], up to 17.5" tall, and 22" diagonally
- No power required, movement is controlled by counterbalancing weights
- Swivels  $\pm 112.5^\circ$  for expanded viewing access
- Black electroplate finish

### SPECIAL FEATURES

- Easy to install
- Unit raises 21 inches in less than 2 seconds

### OPTIONAL KITS

#### Additional Weight Pack

P/N 2990-9774-BE

#### VESA 18° Tilt Bracket

P/N 2990-9776-BE

#### Weight Extension Plate Kit

P/N 2990-9775-BE

#### VESA Fixed Bracket

P/N 2990-9777-BE


**NOTE:** Packaging includes wire management, cable control kit, and one weight pack.

## CB3620-258TV

225-lb. [102 kg] load rating\*



A smooth pull-out swivel that holds televisions up to 36" diagonally.

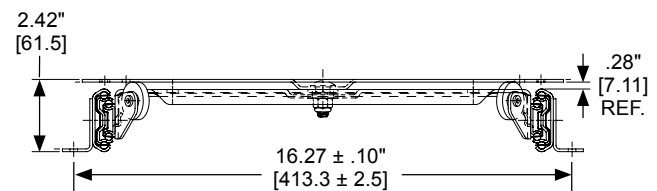

### SPECIFICATIONS

- 14" [356 mm] extension
- Holds televisions up to 36" [914 mm] diagonally
- Steel ball bearings
- Black zinc plating

### SPECIAL FEATURES

- Hold-in detent to prevent roll-out and bounce-back
- Smooth, stable movement
- 360° swivel
- Silenced in and out


\* Load rating based on 10,000 cycle test.

## 2006

45-lb. [20 kg] load rating



Known as the pencil drawer slide, this product is designed for suspended drawers beneath desks or tabletops.

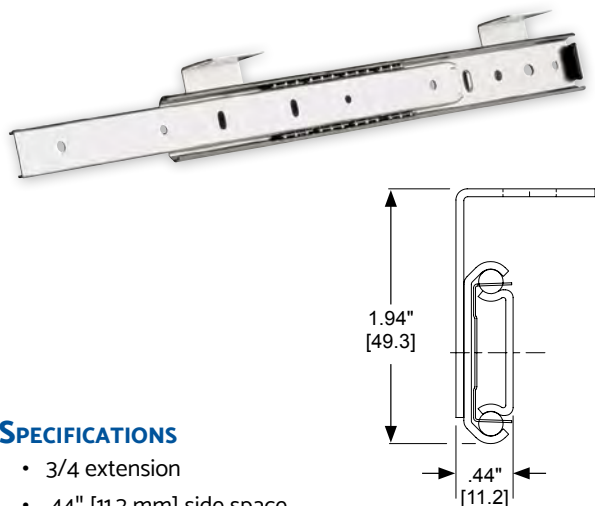

### SPECIFICATIONS

- 3/4 extension
- .44" [11.2 mm] side space
- Drawer widths up to 16" [406 mm]
- Friction disconnect
- Steel ball bearings
- Simple, fixed height bracket installation
- Lengths 12"-28" [305-711 mm]
- Clear zinc or black finish


## 2109

75-lb. [34 kg] load rating



Keyboard trays, pencil drawers, and suspended drawers requiring a detent in and out.

Bracket mounts  
inboard or outboard



### SPECIFICATIONS

- 3/4 extension
- .50" [12.7 mm] side space (.66" [16.8 mm] with bracket)
- Drawer widths up to 16" [406 mm]
- Lever disconnect
- Steel ball bearings
- Even lengths 12"-28" [300-700 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Hold-in and hold-out detent
- Variable height mounting brackets
- Flexibility of inboard or outboard bracket mounting

#### Mounting bracket kit (zinc):

P/N 4180-0400-XE

#### Mounting bracket kit (black):

P/N 4180-0401-XE

#### Clip-on Bracket (zinc):

P/N 5410-08XX (varies by length)

# Keyboard Systems




*Ergonomically designed for home and business office workstations.*

## SPECIFICATIONS


- Fully concealed slides ensure no rough or exposed edges
- Removable palm rest allows unit to accommodate virtually any size keyboard
- Extra-wide tray provides ample mousing surface
- Built-in cable management
- Removable mouse pad for left or right-handed mousing
- Typing surface held in place when in use or stored
- Mounting brackets feature seven adjustment heights and can be mounted inboard or outboard depending upon installation requirements
- Steel ball bearing

## CBERGO-TRAY 300 - DELUXE

### CBERGO-TRAY 200

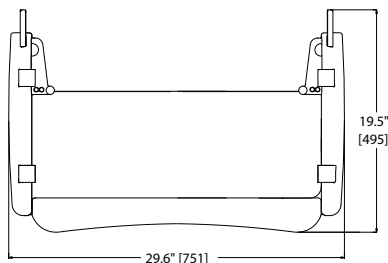


### CBERGO-TRAY 300 - DELUXE

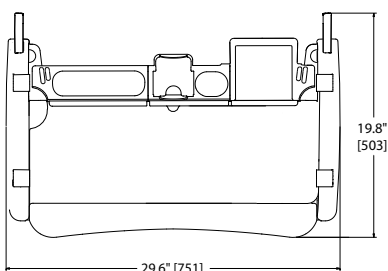

## CBERGO-TRAY 200

- 3/4 extension slides
- Foam palm rest
- Angled keyboard

*Side view shared for both models*

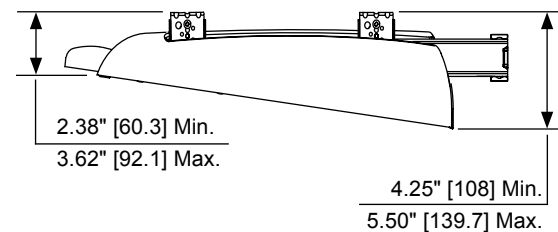


- Full extension slides
- Typing surface secures in partially or fully extended positions
- Gel palm rest
- Rear storage compartments
- Adjustable keyboard platform offers three typing positions for maximum user comfort

## 2019

75-lb. [34 kg] load rating



Known as the quick-install shelf slide, this product has bent-down tabs to allow for platform-style shelf mounting.

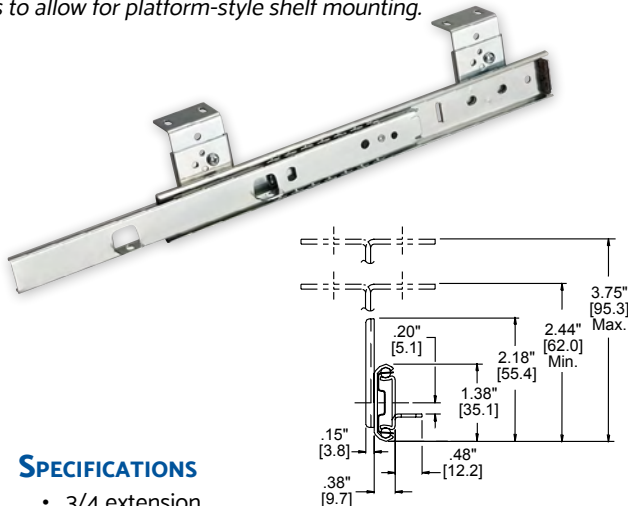

### SPECIFICATIONS

- 3/4 extension
- .38" [9.7 mm] side space
- Drawers up to 16" [406 mm] wide
- Lever disconnect
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

### SPECIAL FEATURES

- Hold-out detent
- Optional bracket kit mounts in-board or out and provides up to 1.31" [33.2 mm] of vertical adjustment.

#### Optional bracket kit, zinc:

P/N 4180-0255-XE

#### Optional bracket kit, black:


P/N 4180-0257-XE

## 2002

50-lb. [23 kg] load rating



This slide offers two-way travel, which works well on pass-through shelves, kitchen islands, and medical carts.

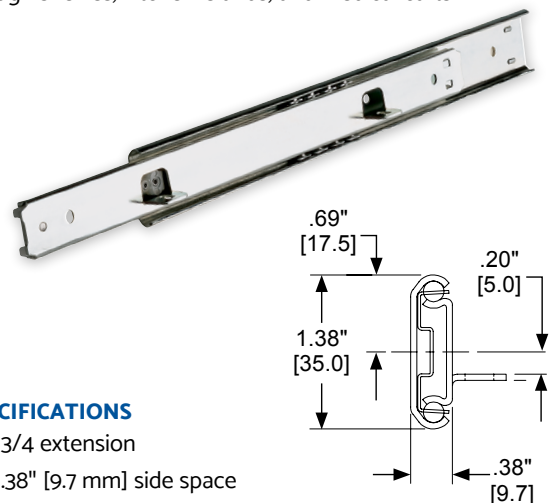

### SPECIFICATIONS

- 3/4 extension
- .38" [9.7 mm] side space
- Drawers up to 12" [305 mm] wide
- Non-disconnect
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

### SPECIAL FEATURES


- Shelf/bottom mount tabs
- Internal detent secures in center position
- Provides access from both sides of installation

**O363**


100-lb. [45 kg] load rating



Offering full extension and two-way travel, this slide is for use in kitchen islands, dining or entertainment bars, or other cabinetry or carts that benefit from two-sided access.

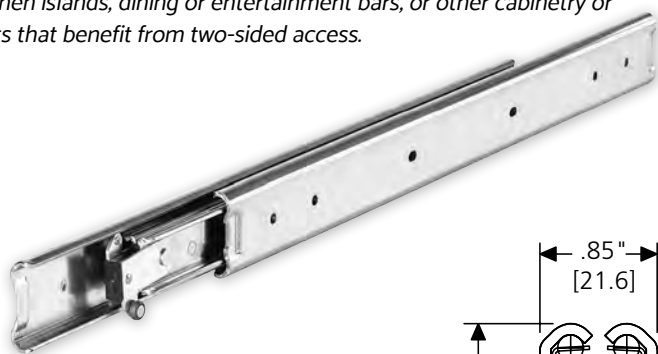**SPECIFICATIONS**

- Full extension from center point in both directions
- .85" [21.6 mm] side space
- Drawers up to 18" [457 mm] wide
- Non-disconnect
- Steel ball bearings
- Tested to 80,000 cycles
- Available lengths: 12", 14", 16", 18", 20", 22", 24", and 28" [300, 350, 400, 450, 500, 550, 600 and 700 mm]
- Clear zinc finish

**SPECIAL FEATURES**


- Two-way travel provides access from both sides of installation
- Hold-in detent at center keeps conveyances in position until use

## 322

100-lb. [45 kg] load rating



*This pull-out shelf slide is designed for entertainment center shelves, appliance drawers, and pan shelves.*

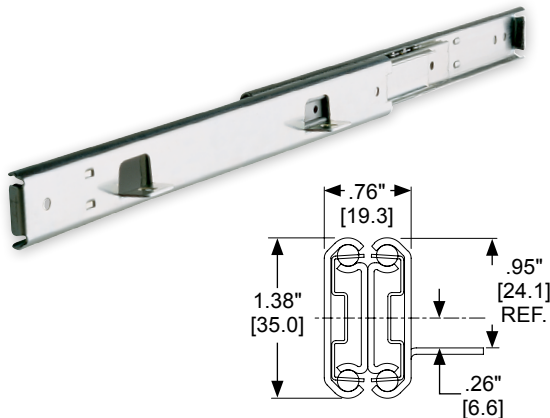

### SPECIFICATIONS


- Full extension + .88" [22.4 mm]
- .76" [19.3 mm] side space
- Drawers up to 16" [406 mm] wide
- Non-disconnect
- Tab mounting
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

## 340

110-lb. [50 kg] load rating



*Known as the butcher block slide, model 340 is ideal for cutting boards, printer, and work surface shelves.*

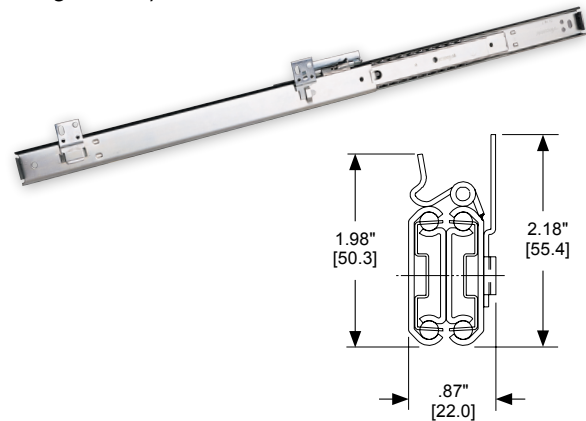

### SPECIFICATIONS

- Full extension
- .87" [22 mm] side space
- Drawers up to 18" [457 mm] wide
- Even lengths 16"-22" [406-559 mm]
- Steel ball bearings
- Clear zinc or black finish

### SPECIAL FEATURES


- Bracket mount/disconnect
- Easy disconnect for removal and work surface cleaning
- Lock-out secures slide in open position

**301-2590**

155-lb. [70 kg] load rating



Shelf or platform mounted pull-outs for pantries or entertainment centers.

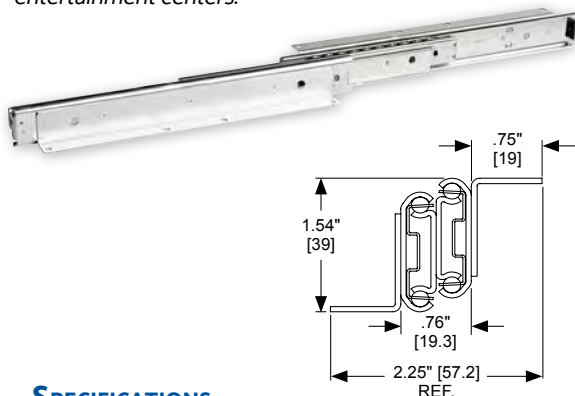**SPECIFICATIONS**

- .83" [21 mm] over travel
- 1.54" [39 mm] vertical space
- Drawers up to 16" [406 mm] wide
- Non-disconnect
- Steel ball bearings
- Even lengths 12"-28" [305-711 mm]
- Clear zinc or black finish

**SPECIAL FEATURES**

- Mounts under shelves
- Hold-in detent to prevent drawer roll-out and bounce-back

**3600-200/3600-201 StowAway**

175-lb. [80 kg] load rating



Keep waste containers and utility bins in kitchens, laundry or hobby rooms neatly out of sight.




3600-201 Shown

**SPECIFICATIONS**

- Full extension
- Drawers up to 20" [508 mm] wide
- Standard 22" length [559 mm]
- Steel ball bearings
- Clear zinc finish

**SPECIAL FEATURES**

- Self-closing action begins within 2-1/2" [63.5 mm] from cabinet opening
- Handed lever disconnect
- Attached brackets permit side, top or bottom mounting

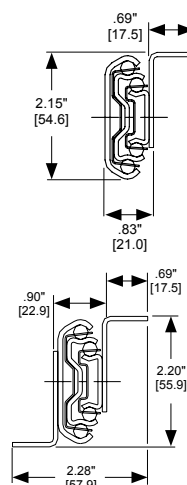**3600-200**

- One fixed inboard bracket
- Outer member side-mounts directly onto cabinet wall

**3600-201**

- Inboard top bracket and outboard bottom bracket
- Slide may be mounted on top or bottom of the cabinet

# Accuride Linear Track Systems

Accuride linear track systems use lightweight, corrosion-resistant aluminum tracks and recirculating ball carriages to guide, move, or position screens, panels, and partitions. Adaptable in many ways, you'll find our systems in industrial, commercial, medical, and institutional environments.

## Common Features & Benefits

### Multiple mounting methods


- The track may be side, flat, or vertically mounted.
- When flat mounted, track may be oriented with the ball carriage facing up or down.
- Vertical mounting is for non-load bearing applications.

### Two re-circulating ball carriage options

- Stainless steel ball bearings: provides the greatest load capacity.
- Polymer ball bearings: grease-free with smooth and quiet movement.

### Multiple carriages may be inserted into tracks

- Carriages may be used separately to provide independent movement, combined as a unit, or both methods within one track.

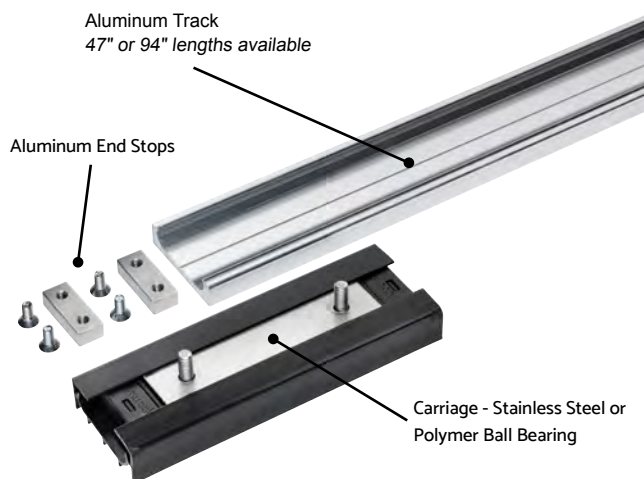

## 115RC

*For light- and medium-duty applications*

### Aluminum track available in two lengths: 47" and 94"

- Corrosion-resistant track may be cut to the desired length. Available with or without pre-drilled holes.
- Multiple lengths of track can be butted together to extend the track to any distance required.

### Load Capacity up to 265 lbs. [120kg]

### Easy Installation

### TRACKS HAVE DRILLING MARKS FOR FIXING HOLES AND END STOPS.

- End stops are attached after the carriages are inserted to contain carriages.
- Tracks with and without fixing holes

## COMPONENTS

Tracks and carriages are priced and sold singly.

AL0115-012ORCH . . . . 47" Aluminum Track (x1) with Pre-Drilled holes

AL0115-024ORCH . . . . 94" Aluminum Track (x1) with Pre-Drilled holes

AL0115-012ORC . . . . 47" Aluminum Track (x1) without Pre-Drilled holes

AL0115-024ORC . . . . 94" Aluminum Track (x1) without Pre-Drilled holes

SS0115-CASSRC . . . . Carriage - Stainless Steel Balls (x1)

CB0115-CASSRC . . . . Carriage - Polymer Balls (x1)

AL0115-STOPRC . . . . Aluminum End Stop (1 stop + 2 screws)

## 115RC OPTIONAL ACCESSORIES

DZ0115-DJIGRC . . . . Drilling Jig (made to order)

CB0115-ECRC . . . . Easy-Close Kit - Includes dampening mechanism and engagement plate. Fasteners not included.

4180-0757-XE . . . . Nuts and Washers for Individual Carriages

- 2 ea. M5 5/8 inch Barrel nuts
- 2 ea. Star washers

| Side Mount                  | SS0115-CASSRC<br>Stainless Steel Ball Carriage | CB0115-CASSRC<br>Polymer Ball Carriage |
|-----------------------------|------------------------------------------------|----------------------------------------|
|                             | X1 - 110 lbs.                                  | X1 - 65 lbs.                           |
|                             | X2 - 200 lbs.                                  | X2 - 120 lbs.                          |
|                             | X3 - 265 lbs.                                  | X3 - 160 lbs.                          |
| Flat Mount<br>Carriage UP   | SS0115-CASSRC<br>Stainless Steel Ball Carriage | CB0115-CASSRC<br>Polymer Ball Carriage |
|                             | X1 - 65 lbs.                                   | X1 - 40 lbs.                           |
|                             | X2 - 120 lbs.                                  | X2 - 70 lbs.                           |
|                             | X3 - 155 lbs.                                  | X3 - 90 lbs.                           |
| Flat Mount<br>Carriage DOWN | SS0115-CASSRC<br>Stainless Steel Ball Carriage | CB0115-CASSRC<br>Polymer Ball Carriage |
|                             | X1 - 90 lbs.                                   | X1 - 50 lbs.                           |
|                             | X2 - 155 lbs.                                  | X2 - 90 lbs.                           |
|                             | X3 - 200 lbs.                                  | X3 - 120 lbs.                          |

**Note:** Weight should be evenly distributed across the carriage(s).

## 115RC OPTIONAL ACCESSORIES

4180-0756-XE . . . . 115RC Hardware Kit  
with Polymer Ball Carriages


- 2 ea. CB0115-CASSRC
- 2 ea. AL0115-STOPRC
- 4 ea. M5 5/8 inch Barrel nuts
- 4 ea. Star washers

4180-0746-XE . . . . 115RC Hardware Kit  
with Stainless Steel Ball Carriages

- 2 ea. SS0115-CASSRC
- 2 ea. AL0115-STOPRC
- 4 ea. M5 5/8" Barrel nuts
- 4 ea. Star washers

# 116RC

## Heavy-Duty Linear Motion Track System

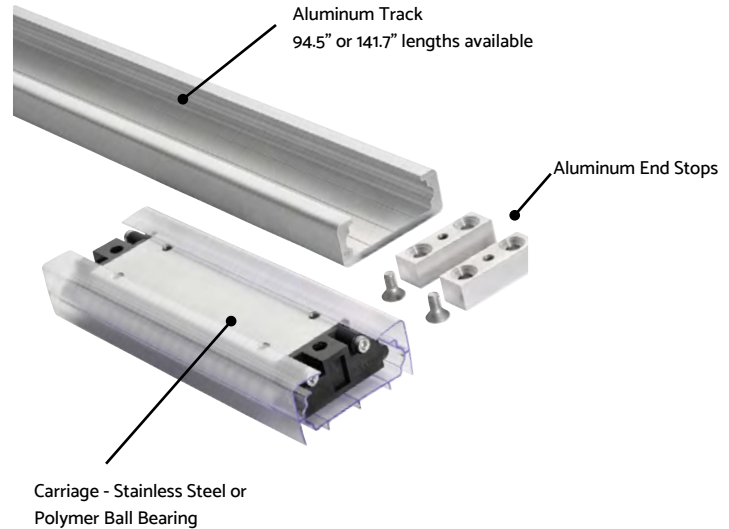

### FEATURES

- Available in two lengths: 94.5" [2400 mm] and 141.7" [3600 mm]
- Load Capacity up to 793 lbs. [360kg]
- Can be fitted for sliding door application
- ADA ccompliant

### COMPONENTS

Tracks and carriages are priced and sold singly.

- AL0116-O24RC . . . . . 94.5" Aluminum Track (x1)  
 AL0116-O36RC . . . . . 141.7" Aluminum Track (x1)  
 SSO116-CASSRC . . . . . Carriage – Stainless Steel Balls (x1)  
 CBO116-CASSRC . . . . . Carriage – Polymer Balls (x1)  
 AL0116-STOPRC . . . . . Aluminum End Stop (1 stop + 2 screws)  
 SSO116-BRKTO1RC . . . . . Recycling Bracket (x1)




### 11RC OPTIONAL KITS

- CBO116-DAMP . . . . . Damper (x1)


### SLIDING DOOR HARDWARE

- AL0116-SUPPRC . . . . . Support Beam (x1)  
 AL0116-FASCRC . . . . . Fascia (x1)  
 AL0116-ECAPRC-2 . . . . . Fascia end caps (2 caps + 8 screws)  
 SSO116-BRKT-KIT . . . . . Bracket Kit tool (x1)

**NOTE:** Due to the extensive variety of applications and possible orientations for this product, we recommend that customers first test this product in the intended application. This product is not recommended for high-torque applications.

| Side Mount                                                                           | SSO115-CASSRC<br>Stainless Steel Ball Carriage | CBO115-CASSRC<br>Polymer Ball Carriage |
|--------------------------------------------------------------------------------------|------------------------------------------------|----------------------------------------|
|   | 331 lbs. (x1)                                  | 220 lbs. (x1)                          |
|                                                                                      | 639 lbs. (x2)                                  | 397 lbs. (x2)                          |
|                                                                                      | 793 lbs. (x3)                                  | 529 lbs. (x3)                          |
| Flat Mount<br>Carriage UP                                                            | SSO115-CASSRC<br>Stainless Steel Ball Carriage | CBO115-CASSRC<br>Polymer Ball Carriage |
|  | 198 lbs (x1)                                   | 132 lbs. (x1)                          |
|                                                                                      | 361 lbs. (x2)                                  | 240 lbs. (x2)                          |
|                                                                                      | 465 lbs. (x3)                                  | 309 lbs. (x3)                          |
| Flat Mount<br>Carriage DOWN                                                          | SSO115-CASSRC<br>Stainless Steel Ball Carriage | CBO115-CASSRC<br>Polymer Ball Carriage |
|  | 264 lbs. (x1)                                  | 176 lbs. (x1)                          |
|                                                                                      | 465 lbs. (x2)                                  | 311 lbs. (x2)                          |
|                                                                                      | 595 lbs. (x3)                                  | 396 lbs. (x3)                          |

**Note:** Weight should be evenly distributed across the carriage(s).

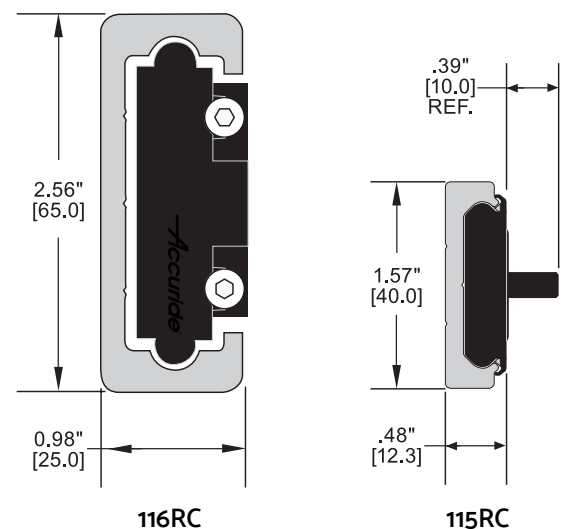


## AL4190

### Tilt Track System

140-lb. [63.5 kg] load rating



A track system that extends and tilts drawers downward for easy viewing and access to contents. Use for supply and equipment storage in retail fixtures, commercial kitchens and restaurants, medical facilities, garages, and more..

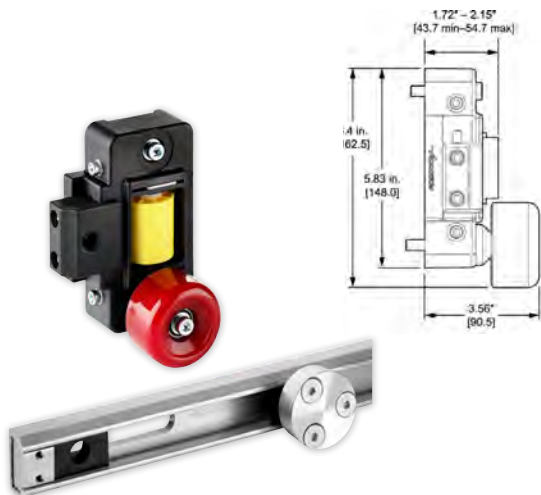

AL4190 Tilt Track System

#### SPECIFICATIONS

- Extends and tilts downwards
- Drawers up to 40" wide
- Aluminum track in two lengths
  - 24" [600 mm]
  - 40" [1000 mm]
- Roller wheel assemblies dampen and smooth out the movement
- Non-disconnect

#### SPECIAL FEATURES


- Corrosion resistant
- Angle of tilts is preset by installer
- Track can be cut to length for custom fit
- Fully adjustable from the front and with the drawer in place
- Can be used with CBHand-2 Locking Handle Kit to add lock-in feature

## CB-Hand


### Locking Handle Kit



Adds lock-in and lock-out features to heavy-duty drawers or trays. Suitable for installations where the locking feature provides a measure of safety.

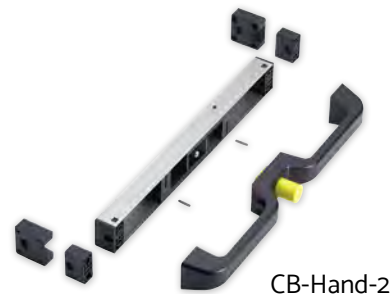

CB-Hand-2



#### SPECIFICATIONS

- Compatible with models such as 3640A, 7950, 7957, 9301, and other slides with cross sections .75" or greater [17.5 mm].
- Accommodates drawers up to 60" [1524 mm] wide.
- One-hand operation: activates with a centrally located push-button.
- Two locking options:
  - Front mounted unit – lock-in only (CBHAND-2)
  - Rear mounted unit – lock-in and lock-out (CBHAN4-5)
- Connecting rod not included
- Lock-out not intended for use with over travel slides
- Cut-to-length stainless steel rods allow for varying drawer widths (ordered separately).

#### SPECIAL FEATURES

- Lightweight and corrosion resistant components

#### OPTIONAL KITS

##### CBHAN4-5

Lock-out conversion kit


##### CBHAN3-0100-2

2 ea. 19.7" [500 mm] Stainless Steel Rods

##### CBHAN3-0150-2

2 ea. 29.5" [750 mm] Stainless Steel Rods

**NOTE:** The addition of the lock-out kit requires an additional threaded bar (not included). See product technical sheet for details.

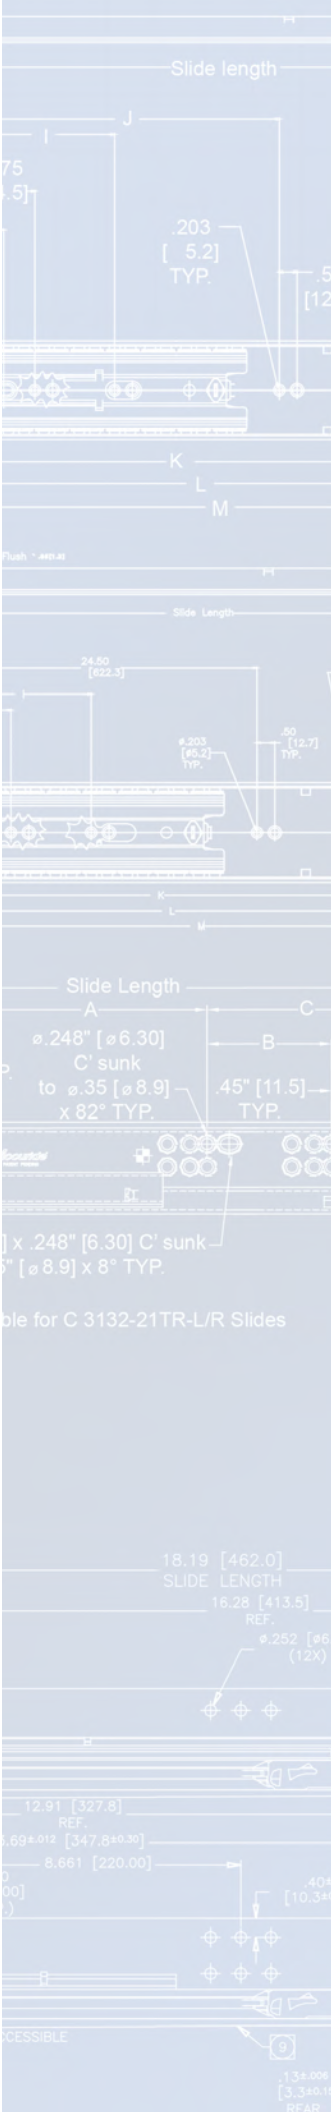

## ACCURIDE® LIMITED LIFETIME WARRANTY

Accuride warrants its Accuride-branded drawer slides against defects in material and workmanship for so long as the original purchaser owns them.\* This warranty does not cover drawer slides which have been damaged due to abuse, improper installation, excessive loads, or any use contrary to the instructions accompanying the product.

Accuride will send the purchaser a replacement of the same model or a comparable model at no cost. This warranty is for replacement only and does not cover the cost of removal, installation, or other incidental charges.

To obtain a replacement slide under this warranty, contact Accuride Technical Support within 30 days of the discovery of the defect. Please let us know how the product was used and the type of defect or malfunction experienced.

The foregoing express limited warranty is in lieu of all other express warranties and excludes incidental or consequential damages. This warranty does not apply to products sold and used outside of the United States and Canada. All warranties implied by state law, including implied warranties of merchantability and fitness for a particular purpose, are expressly limited. Some states do not allow limitations on how long an implied warranty lasts or exclusion of incidental or consequential damages, so the foregoing limitation or exclusion may not apply to you. This Limited Lifetime Warranty gives you specific legal rights, and you may have other rights which vary from state to state.

*\* This warranty does not apply to the cylinder for the Easy-Down® Flipper Door Slide®, CBERGO-TRAY Keyboard Systems, Senseon® or any other Accuride product for which the expressed warranty differs from the Limited Lifetime Warranty offered above.*

**Please contact Accuride Technical Support for further information.**

<https://www accuride.com/en-us/contacts/technical-support>

**Accuride®**  
Always Moving Forward

INTERNATIONAL HEADQUARTERS

12311 Shoemaker Avenue ○  
Santa Fe Springs, California 90670  
562 903-0200 Telephone  
562 903-0208 Fax  
www accuride com

Calle Circuito Norte No. 6 ○  
Parque Industrial Nelson  
Mexicali, B.C., C.P. 21395 Mexico



EUROPE

Liliput Road ○  
Brackmills Industrial Estate  
Northampton, NN4 7AS  
United Kingdom  
(441) 604-761111 Telephone  
(441) 604-767190 Fax  
www accuride europe com

Postfach 1464 ○  
Werner - Von Siemens - Strasse 16-18  
65582 Diez/Lahn  
Germany  
(49 64 32) 6 08-0 Telephone  
(49 64 32) 6 08-20 Fax  
www accuride europe com



ASIA

Accuride Japan Co., Ltd. ○  
44 Minami-asaji Iwata Yawata-shi  
Kyoto, Japan  
81-75-983-7500 Telephone  
81-75-983-9500 Fax  
www accuride co jp

Accuride International Suzhou Co. LTD ○  
No. 178, Suhong East Road  
Suzhou Industrial Park  
Jiangsu Province, China 215026  
86-512-62731200 Telephone  
86-512-62833993 Fax  
www accuride com cm



DISTRIBUTED BY:

**Accuride®**  
Always Moving Forward

Stay connected:



**Accuride printed materials are;**  
Printed with soy based inks. Printed on paper that  
contains recycled materials and conforms to the  
latest sustainable arboriculture guidelines.