
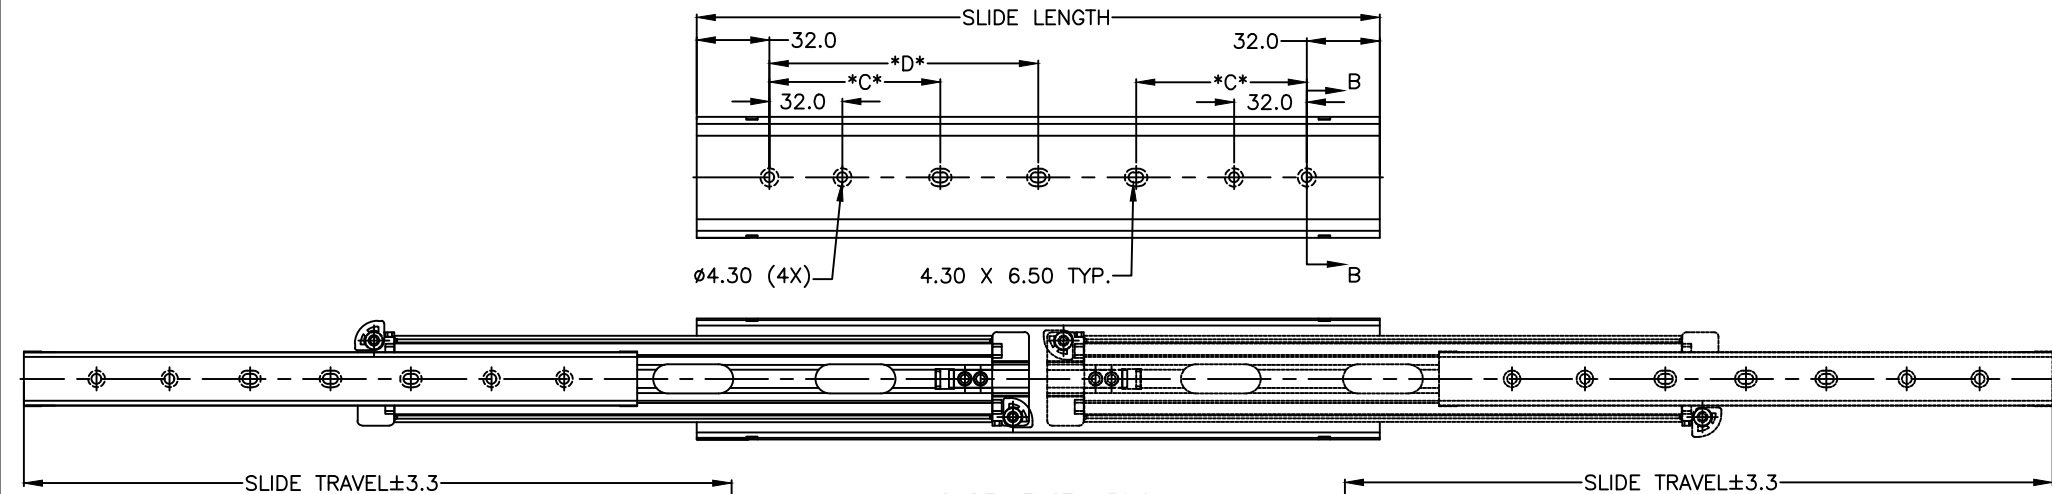


SECTION A-A



SECTION B-B

9. SLIDE IS TWO- WAY TRAVEL
8. SLIDE ASSEMBLY IS UNHANDED
7. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE MEMBERS AT ACCURIDE OPTION.
6. USE ONLY SLOTTED PAN OR SLOTTED BINDING HEAD SCREWS FOR MOUNTING THROUGH SLIDE MEMBERD. MAX. 2.54 MM HIGH X 9.65 MM DIAMETER SCREW HEAD CLEARANCE NECESSARY IN ORDER TO CLEAR TRAVERSING BALL RETAINER
5. WIDTH OF SLIDE IS MEASURED IN CLOSED POSITION, ACROSS THE AREA WHERE THE SLIDE MEMBERS ARE FULLY ENGAGED WITH BALL BEARINGS.
4. FINISH: CH
3. LUBRICANT: HIGH-LOW TEMPERATURE GREASE.
2. BALL BEARINGS: CARBURIZED STEEL;
1. MATERIAL: SLIDE MEMBERS AND COMPONENT PARTS: WORK-HARDENED, COLD-ROLLED STEEL.

NOTES: UNLESS OTHERWISE SPECIFIED

PART NUMBER	SLIDE LENGTH (MM.)	SLIDE TRAVEL (MM.)	LOAD RATING (KG.)	*A* (MM.)	*B* (MM.)	*C* (MM.)	*D* (MM.)
CH3603-12P	300	311		—	102.7	—	—
CH3603-14P	350	360		112.0	—	112.0	—
CH3603-16P	400	409		112.0	—	144.0	—
CH3603-18P	450	458		144.0	—	144.0	—
CH3603-20P	500	508		144.0	—	144.0	—
CH3603-22P	550	557		144.0	—	144.0	—
CH3603-24P	600	606		144.0	252.7	144.0	268.0
CH3603-26P	650	655		144.0	277.7	144.0	293.0
CH3603-28P	700	704		144.0	302.7	144.0	318.0

REV	IS	DESCRIPTION	WAS	DATE	APPD
REVISIONS					

Accuride CUSTOMER: Accuride				Accuride CUSTOMER DOCUMENT OF STANDARD SLIDE	
P/N:		REV.			
SCALE N.T.S.	DATE	CONTROLLING DOCUMENT ☒ ACCURIDE ☐ CUST. MGE DMT		PART NUMBER CH3603-12/28	
DRAWN H.W	Oct-10-2021	TOLERANCES, UNLESS OTHERWISE INDICATED .xxx ± .010 .25 TVL ± .13 3.3 .xx ± .030 .76 HOLES ± .006 .15 ANG. ± 1°		REV. *	
APPROVED		THIS DOCUMENT IS FURNISHED FOR THE EXPRESS AND EXCLUSIVE PURPOSE OF CONVEYING INFORMATION TO CUSTOMERS AND SUPPLIERS OF ACCURIDE INTERNATIONAL INC., AND IS NOT TO BE DISCLOSED TO COMPETITIVE SOURCES.			