


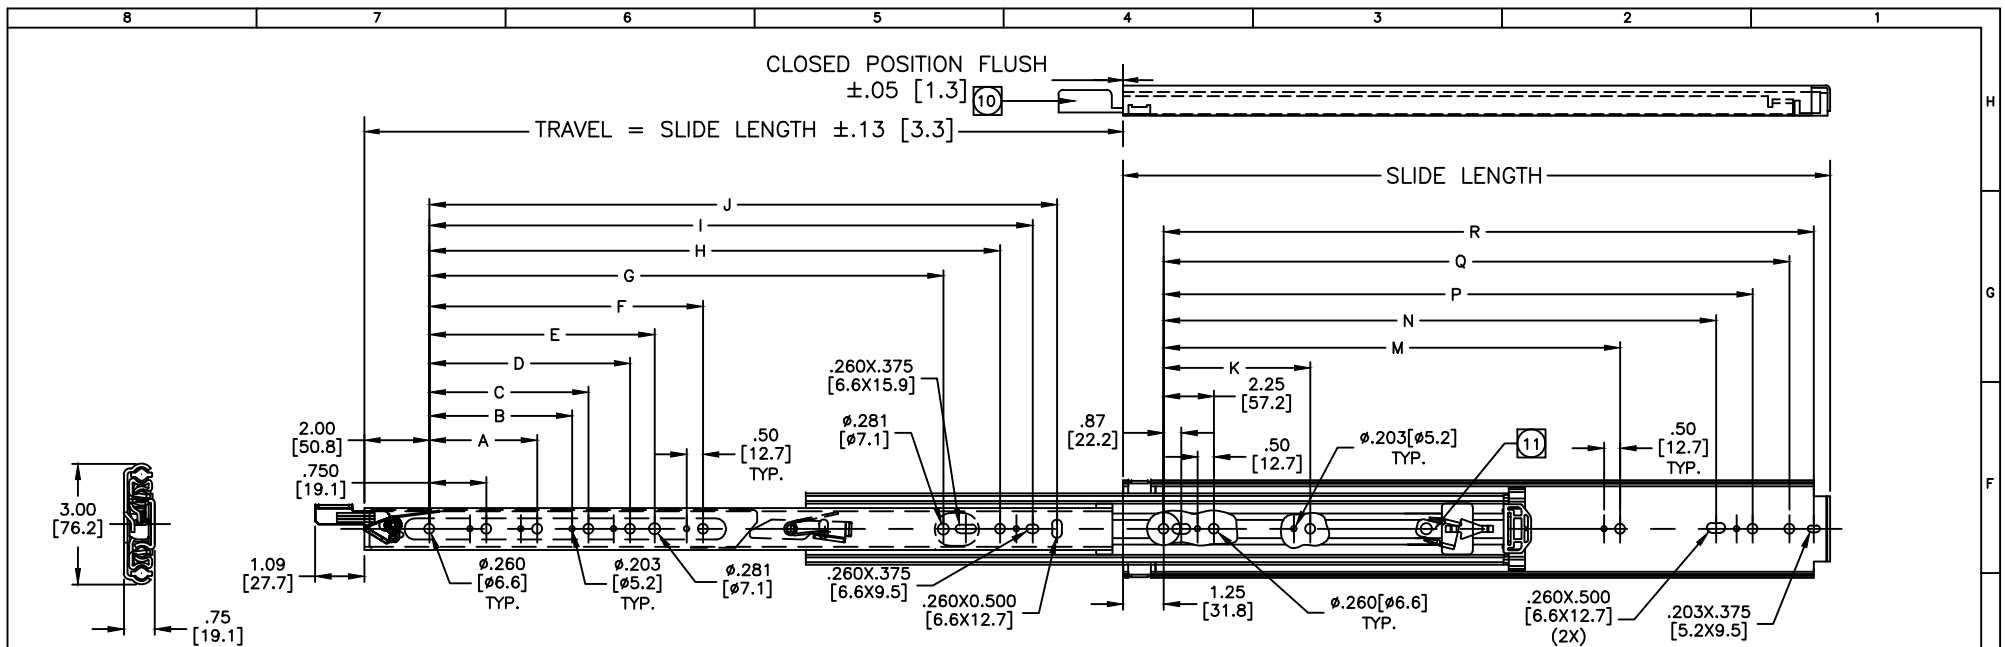

P/N	LENGTH	A	B	C	D	E	F	G	H	I	J	K	M	N	P	Q	R
-12	12.00 [304.8]	---	---	---	---	---	---	---	5.32 [135.0]	6.32 [160.4]	7.06 [179.4]	---	---	7.25 [184.1]	8.37 [212.7]	9.50 [241.3]	10.25 [260.4]
-14	14.00 [355.6]	1.75 [44.5]	---	---	---	---	---	---	7.32 [185.8]	8.32 [211.2]	9.06 [230.2]	---	---	9.25 [234.9]	10.37 [263.5]	11.50 [292.1]	12.25 [311.2]
-16	16.00 [406.4]	1.75 [44.5]	3.75 [95.3]	---	---	---	---	---	9.32 [236.6]	10.32 [262.0]	11.06 [281.0]	---	---	11.25 [285.7]	12.37 [314.3]	13.50 [342.9]	14.25 [362.0]
-18	18.00 [457.2]	1.75 [44.5]	3.75 [95.3]	---	---	---	---	---	11.32 [287.4]	12.32 [312.8]	13.06 [331.8]	---	---	13.25 [336.5]	14.37 [365.1]	15.50 [393.7]	16.25 [412.8]
-20	20.00 [508.0]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	---	---	---	10.25 [260.5]	13.32 [338.2]	14.32 [363.6]	15.06 [382.6]	---	---	15.25 [387.3]	16.37 [415.9]	17.50 [444.5]	18.25 [463.6]
-22	22.00 [558.8]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	---	---	12.25 [311.3]	15.32 [389.0]	16.32 [414.4]	17.06 [433.4]	---	---	17.25 [438.1]	18.37 [466.7]	19.50 [495.3]	20.25 [514.4]
-24	24.00 [609.6]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	14.25 [362.1]	17.32 [439.8]	18.32 [465.2]	19.06 [484.2]	---	---	19.25 [488.9]	20.37 [517.5]	21.50 [546.1]	22.25 [565.2]
-26	26.00 [660.4]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	16.25 [412.9]	19.32 [490.6]	20.32 [516.0]	21.06 [535.0]	---	---	21.25 [539.7]	22.37 [568.3]	23.50 [596.9]	24.25 [616.0]
-28	28.00 [711.2]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	18.25 [463.7]	21.32 [541.4]	22.32 [566.8]	23.06 [585.8]	---	---	23.25 [590.5]	24.37 [619.1]	25.50 [647.7]	26.25 [666.8]
-30	30.00 [762.0]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	20.25 [514.5]	23.32 [592.2]	24.32 [617.6]	25.06 [636.6]	8.50 [215.9]	19.00 [482.6]	25.25 [641.3]	26.37 [669.9]	27.50 [698.5]	28.25 [717.6]
-32	32.00 [812.8]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	22.25 [565.3]	25.32 [643.0]	26.32 [668.4]	27.06 [687.4]	8.50 [215.9]	21.00 [533.4]	27.25 [692.1]	28.37 [720.7]	29.50 [749.3]	30.25 [768.4]
-34	34.00 [863.6]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	24.25 [616.1]	27.32 [693.8]	28.32 [719.2]	29.06 [738.2]	8.50 [215.9]	23.00 [584.2]	29.25 [742.9]	30.37 [771.5]	31.50 [800.1]	32.25 [819.2]
-36	36.00 [914.4]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	13.75 [349.3]	26.25 [666.9]	29.32 [744.6]	30.32 [770.0]	31.06 [789.0]	8.50 [215.9]	25.00 [635.0]	31.25 [793.7]	32.37 [822.3]	33.50 [850.9]	34.25 [870.0]
-40	40.00 [1016.0]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	13.75 [349.3]	32.25 [768.5]	35.32 [846.2]	36.32 [871.6]	37.06 [890.6]	8.50 [215.9]	29.00 [736.6]	35.25 [895.3]	36.37 [923.9]	37.50 [952.5]	38.25 [971.6]
-42	42.00 [1066.8]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	13.75 [349.3]	34.25 [819.3]	37.32 [897.0]	38.32 [922.4]	39.06 [941.4]	8.50 [215.9]	31.00 [787.4]	37.25 [946.1]	38.37 [974.7]	39.50 [1003.3]	40.25 [1022.4]

8. SLIDE IS PROVIDED WITH A SILENCING BUMPER IN THE CLOSED POSITION.
7. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE MEMBERS AT ACCURIDE OPTION.
6. USE ¼ INCH [M6] HEX-HEAD SCREWS WITH .260 [6.60] HOLES OR #10 [M5] HEX-HEAD SCREWS WITH .203 [5.16] HOLES FOR MOUNTING THROUGH SLIDE MEMBERS. MAXIMUM SCREW HEAD OF .190 [4.83] HIGH X .475 [12.07] DIAMETER NECESSARY TO CLEAR TRAVERSING MEMBERS.
5. WIDTH OF SLIDE MEASURED IN CLOSED POSITION, ACROSS THE AREA WHERE THE SLIDE MEMBERS ARE FULLY ENGAGED WITH BALL BEARINGS.
4. FINISH: NO REQUIREMENT.
3. LUBRICANT: HIGH-LOW TEMPERATURE GREASE.
2. BALL BEARINGS: STAINLESS STEEL.
1. MATERIAL: STAINLESS STEEL.

NOTES: UNLESS OTHERWISE SPECIFIED

12. THESE HOLES BECOME UNAVAILABLE WHEN USING CARRIAGE BOLTS MOUNTING OPTIONS.
11. SLIDE'S LOCK-OUT FEATURE FOR VERTICAL MOUNT ONLY.
10. DEPRESS LEVER TO RELEASE SLIDE FROM IT'S CLOSED POSITION, USE THE SAME LEVER TO RELEASE THE SLIDE FROM IT'S LOCKED OUT POSITION.
9. SLIDE IS PROVIDED WITH A LOCK-IN / LOCK-OUT FEATURE.

SYM.	IS	DESCRIPTION	WAS	DATE	APPD.
REVISIONS					

THIS Accuride PRODUCT COVERED BY U.S. PATENTS #3205025, #3778120 AND OTHER U.S. PATENTS PENDING.			
CUSTOMER: ACCURIDE			
P/N:		REV.	
SCALE N.T.S.	DATE 20231127	CONTROLLING DOCUMENT ☒ ACCURIDE ☐ CUSTOMER	
DRAWN L Yao		TOLERANCES NOT SHOWN in mm xxx ± .010 .25 Travel ± .13 3.3 .xx ± .030 .76 Holes ± .006 .15 Angular ± 1°	
APPROVED		3 MEMBER BALL BEARING HEAVY-DUTY SLIDE	
		PART NUMBER SS9308-12~42	REV. *
THIS DOCUMENT IS FURNISHED FOR THE EXPRESS AND EXCLUSIVE PURPOSE OF CONVEYING INFORMATION TO CUSTOMERS AND SUPPLIERS OF ACCURIDE INTERNATIONAL, INC., AND IS NOT TO BE DISCLOSED TO COMPETITIVE SOURCES.			