


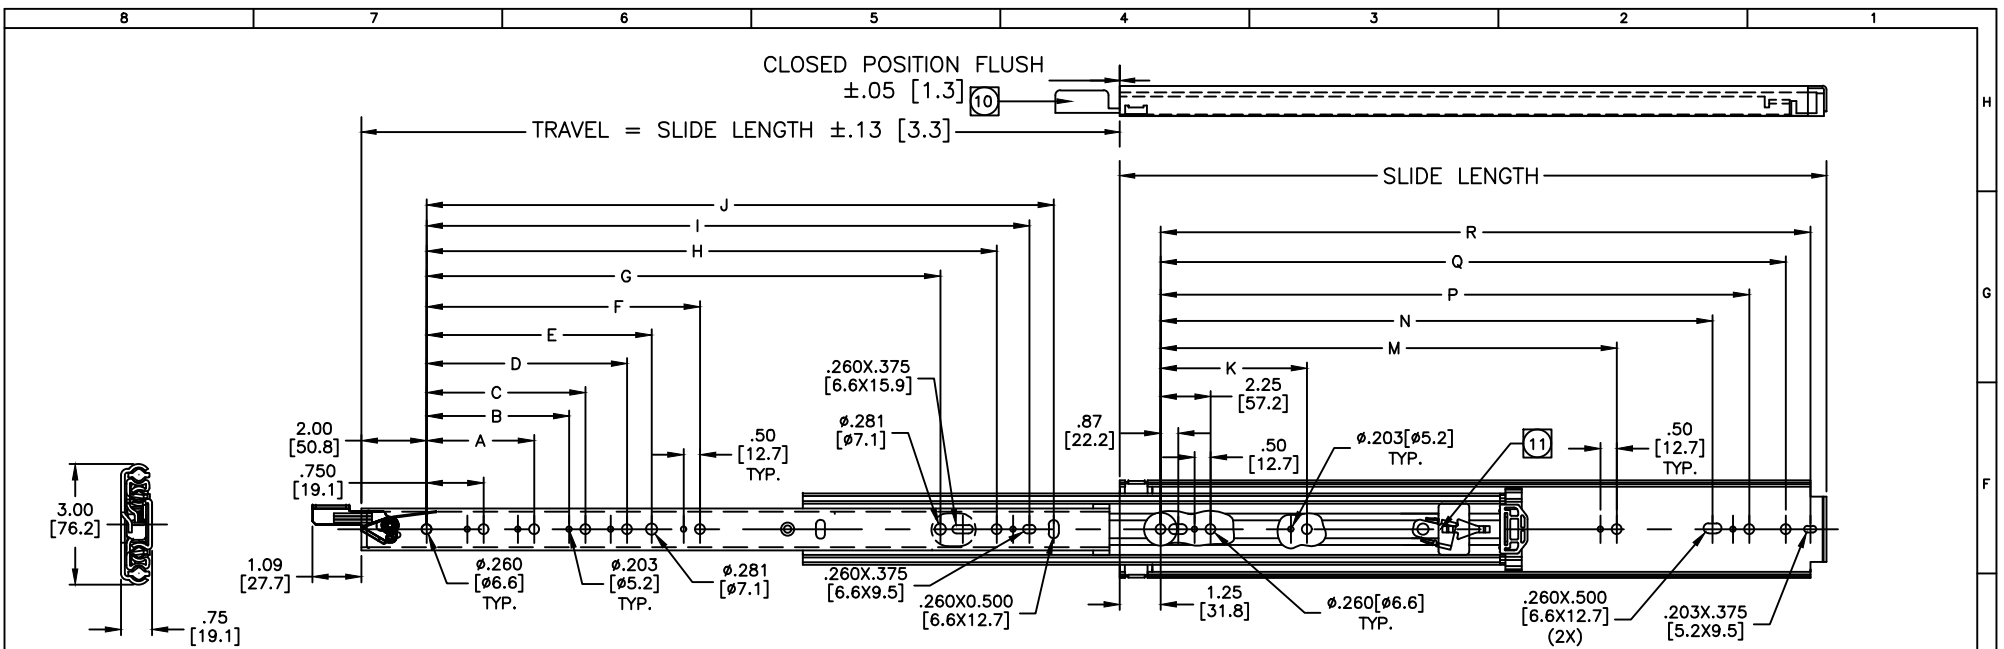

P/N	LENGTH	A	B	C	D	E	F	G	H	I	J	K	M	N	P	Q	R
-12	12.00 [304.8]	---	---	---	---	---	---	---	5.32 [135.0]	6.32 [160.4]	7.06 [179.4]	---	---	7.25 [184.1]	8.37 [212.7]	9.50 [241.3]	10.25 [260.4]
-14	14.00 [355.6]	1.75 [44.5]	---	---	---	---	---	---	7.32 [185.8]	8.32 [211.2]	9.06 [230.2]	---	---	9.25 [234.9]	10.37 [263.5]	11.50 [292.1]	12.25 [311.2]
-16	16.00 [406.4]	1.75 [44.5]	3.75 [95.3]	---	---	---	---	---	9.32 [236.6]	10.32 [262.0]	11.06 [281.0]	---	---	11.25 [285.7]	12.37 [314.3]	13.50 [342.9]	14.25 [362.0]
-18	18.00 [457.2]	1.75 [44.5]	3.75 [95.3]	---	---	---	---	---	11.32 [287.4]	12.32 [312.8]	13.06 [331.8]	---	---	13.25 [336.5]	14.37 [365.1]	15.50 [393.7]	16.25 [412.8]
-20	20.00 [508.0]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	---	---	---	10.25 [260.5]	13.32 [338.2]	14.32 [363.6]	15.06 [382.6]	---	---	15.25 [387.3]	16.37 [415.9]	17.50 [444.5]	18.25 [463.6]
-22	22.00 [558.8]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	---	---	12.25 [311.3]	15.32 [389.0]	16.32 [414.4]	17.06 [433.4]	---	---	17.25 [438.1]	18.37 [466.7]	19.50 [495.3]	20.25 [514.4]
-24	24.00 [609.6]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	14.25 [362.1]	17.32 [439.8]	18.32 [465.2]	19.06 [484.2]	---	---	19.25 [488.9]	20.37 [517.5]	21.50 [546.1]	22.25 [565.2]
-26	26.00 [660.4]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	16.25 [412.9]	19.32 [490.6]	20.32 [516.0]	21.06 [535.0]	---	---	21.25 [539.7]	22.37 [568.3]	23.50 [596.9]	24.25 [616.0]
-28	28.00 [711.2]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	18.25 [463.7]	21.32 [541.4]	22.32 [566.8]	23.06 [585.8]	---	---	23.25 [590.5]	24.37 [619.1]	25.50 [647.7]	26.25 [666.8]
-30	30.00 [762.0]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	20.25 [514.5]	23.32 [592.2]	24.32 [617.6]	25.06 [636.6]	8.50 [215.9]	19.00 [482.6]	25.25 [641.3]	26.37 [669.9]	27.50 [698.5]	28.25 [717.6]
-32	32.00 [812.8]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	22.25 [565.3]	25.32 [643.0]	26.32 [668.4]	27.06 [687.4]	8.50 [215.9]	21.00 [533.4]	27.25 [692.1]	28.37 [720.7]	29.50 [749.3]	30.25 [768.4]
-34	34.00 [863.6]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	---	24.25 [616.1]	27.32 [693.8]	28.32 [719.2]	29.06 [738.2]	8.50 [215.9]	23.00 [584.2]	29.25 [742.9]	30.37 [771.5]	31.50 [800.1]	32.25 [819.2]
-36	36.00 [914.4]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	13.75 [349.3]	26.25 [666.9]	29.32 [744.6]	30.32 [770.0]	31.06 [789.0]	8.50 [215.9]	25.00 [635.0]	31.25 [793.7]	32.37 [822.3]	33.50 [850.9]	34.25 [870.0]
-40	40.00 [1016.0]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	13.75 [349.3]	32.25 [768.5]	35.32 [846.2]	36.32 [871.6]	37.06 [890.6]	8.50 [215.9]	29.00 [736.6]	35.25 [895.3]	36.37 [923.9]	37.50 [952.5]	38.25 [971.6]
-42	42.00 [1066.8]	1.75 [44.5]	3.75 [95.3]	4.25 [107.9]	6.75 [171.5]	7.50 [190.5]	13.75 [349.3]	34.25 [819.3]	37.32 [897.0]	38.32 [922.4]	39.06 [941.4]	8.50 [215.9]	31.00 [787.4]	37.25 [946.1]	38.37 [974.7]	39.50 [1003.3]	40.25 [1022.4]

8. SLIDE IS PROVIDED WITH A SILENCING BUMPER IN THE CLOSED POSITION.
7. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE MEMBERS AT ACCURIDE OPTION.
6. USE $\frac{1}{4}$ INCH [M6] HEX-HEAD SCREWS WITH .260 [6.60] HOLES OR #10 [M5] HEX-HEAD SCREWS WITH .203 [5.16] HOLES FOR MOUNTING THROUGH SLIDE MEMBERS. MAXIMUM SCREW HEAD OF .190 [4.83] HIGH X .475 [12.07] DIAMETER NECESSARY TO CLEAR TRAVERSING MEMBERS.
5. WIDTH OF SLIDE MEASURED IN CLOSED POSITION, ACROSS THE AREA WHERE THE SLIDE MEMBERS ARE FULLY ENGAGED WITH BALL BEARINGS.
4. FINISH: NO REQUIREMENT.
3. LUBRICANT: HIGH-LOW TEMPERATURE GREASE.
2. BALL BEARINGS: STAINLESS STEEL.
1. MATERIAL: STAINLESS STEEL.

NOTES: UNLESS OTHERWISE SPECIFIED

- 11 THESE HOLES BECOME UNAVAILABLE WHEN USING CARRIAGE BOLTS MOUNTING OPTIONS.
- 10 DEPRESS LEVER TO RELEASE SLIDE FROM IT'S CLOSED POSITION,USE THE SAME LEVER TO RELEASE THE SLIDE FROM IT'S LOCKED OUT POSITION.
9. SLIDE IS PROVIDED WITH A LOCK-IN FEATURE.

SYM.	IS	DESCRIPTION	WAS	DATE	APPD.
REVISIONS					

THIS Accuride PRODUCT COVERED BY U.S. PATENTS #3205025, #3778120 AND OTHER U.S. PATENTS PENDING.			
CUSTOMER: ACCURIDE		REV.	
P/N:		REV.	
SCALE N.T.S.	DATE	CONTROLLING DOCUMENT ☒ ACCURIDE ☐ CUSTOMER TOLERANCES NOT SHOWN In mm .xxx $\pm .010$.25 .x $\pm .030$.76 Holes $\pm .006$.15 Angular $\pm 1^\circ$	
DRAWN H.W	20240108	3 MEMBER BALL BEARING HEAVY-DUTY SLIDE	
APPROVED		PART NUMBER SS9307-XXX	REV. *
THIS DOCUMENT IS FURNISHED FOR THE EXPRESS AND EXCLUSIVE PURPOSE OF CONVEYING INFORMATION TO CUSTOMERS AND SUPPLIERS OF ACCURIDE INTERNATIONAL INC., AND IS NOT TO BE DISCLOSED TO COMPETITIVE SOURCES.			