

Specialty Casework – Store Fixtures

When it comes to store fixtures, a carefully chosen slide can mean the difference between a hazardous work area and an attractive, unobstructed walkway or display. Important factors to consider are slide strength, how easily the drawer can be removed, and the special features best suited to the environment.



Specification Suggestions

Accuride **3135EC Eclipse**, fully concealed undermount slide with ball bearing and polymer rollers, lever disconnect, full extension,

soft-closing action, and 100 lbs./pr. [45 kg] load rating.

a. Standard finish: clear zinc

A. Drawer Slides for Light and Medium-Duty Drawers	B. Drawer Slides for Heavy-Duty Drawers	
1. Drawers 24 in. [406 mm] wide or less: Accuride 3832E all ball bearing slide, with lever disconnect, hold-in detent, full extension, and 100 lbs./pr. [45 kg] load rating. a. Standard finish: clear zinc b. Optional finishes: black zinc, electrocoat white	2. Drawers 42 in. [1067 mm] wide or less: Accuride 3640A all ball bearing slide, with rail/bracket mount, full extension + 1 in. [25 mm] over travel, hold-in detent, and 200 lbs./pr. [91 kg] load rating. a. Standard finish: clear zinc	
2. Drawers 24 in. [610 mm] wide or less:	b. Optional finish: black zinc3. Drawers 42 in. [1067 mm] wide or less:	
Accuride 7434 (7432, full extension) all ball bearing slide, with rail mount, full extension + 1 in. [25 mm] over travel, hold-in detent, 100 lbs./pr. [45 kg] load rating, and progressive movement.	Accuride 7957 (7950, non-disconnect) all ball bearing slide with full extension, hand lever disconnect, and 350 lbs./pr. [159 kg] load rating.	
a. Standard finish: clear zincb. Optional finish: black zinc	a. Standard finish: clear zinc	
3. Drawers 30 in. [762 mm] wide or less:		










Specialty Casework – Store Fixtures

Recommendations for slide selections for manufactured casework are based on the following testing:

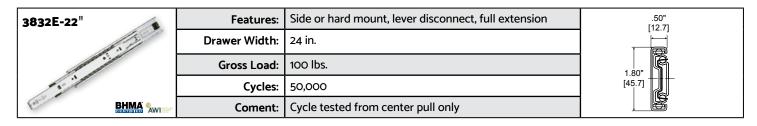

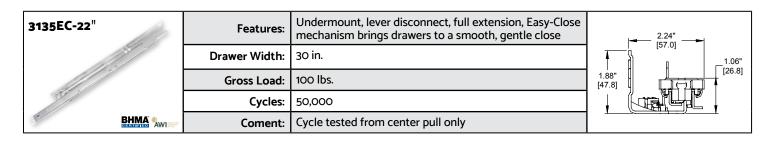

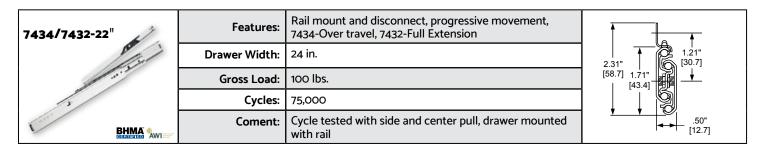

3640A-22"	Features:	Rail/bracket mount and disconnect, over travel	.89" [22.6]
6	Drawer Width:	42 in.	→
	Gross Load:	200 lbs.	2.75" 1.38" [35.1]
	Cycles:	75,000	[69.9] 2.09" [35.1] REF. [53.1]
BHMA AWI	Coment:	Cycle tested with side and center pull, mounted with rail/bracket.	75° [19.1]

7950/7957-22" Features: Side or hard mount, lever disconnect, full extension			
	Drawer Width:	42 in.	2.79"
	Gross Load:	350 lbs.	[70.8]
	Cycles:	10,000	
BHMA AWI	Coment:	Cycle tested from center pull only	.75" [19.1]



